




M8 MALE FLANGE PLUG 1-3-4

Wire 3x0.25 0.2m

Flange male
M8, 3-pole
Front mounting
with multi-strand wire

Link to Product

Illustration

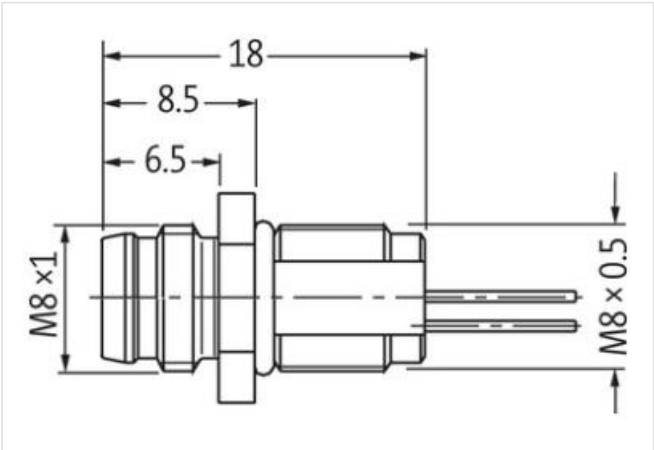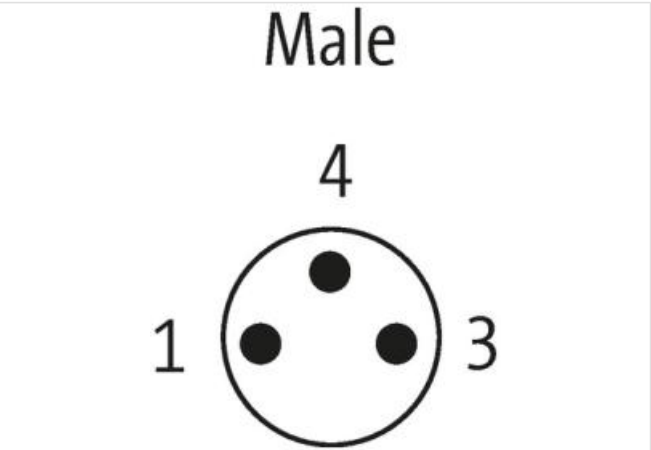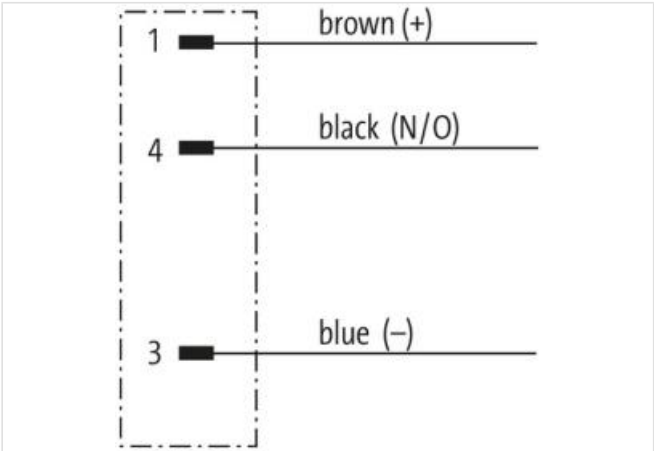

Product may differ from Image

Form	
Form	08551
Technical Data	
Operating voltage	max. 60 V AC/DC
Operating current per contact	max. 4 A
Locking of ports	Screw thread (M8×1 mm) recommended torque 0.4 Nm, self-securing
Protection	IP66K, IP67 inserted and tightened (EN 60529)
General data	
Temperature range	-25...+85 °C
Cables	

No./diameter of wires	3× 0.25 mm ²
Wire isolation	PP (br, bk, bl)
Outer Ø	1.1 mm ±5%
Cable number	970
Temperature range (fixed)	-40...+90 °C
Temperature range (mobile)	-25...+90 °C
Bend radius (fixed)	5× outer Ø
Product article number of manufacturer	7000-08551-9700020
Cable length	0,2 m