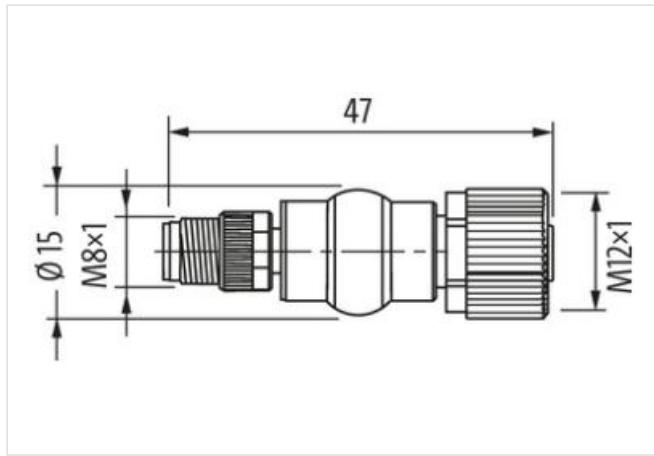
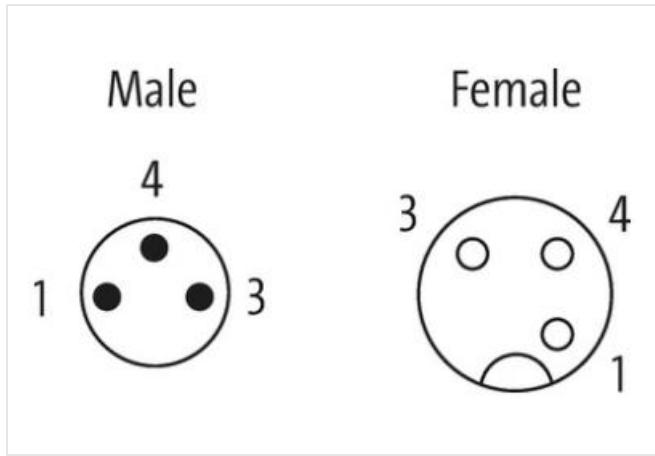
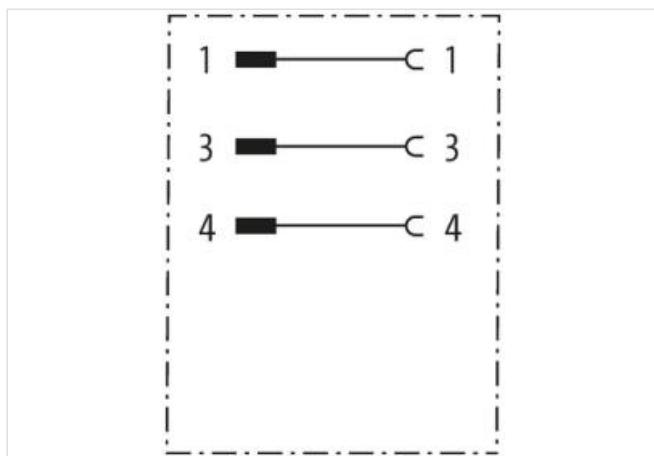


Adaptor M8 male / M12 female A-cod.

3-pol. / 3-pol., conf. 1,3,4

Adapter
Male - female
M8 – M12, 3-pole
for M8 distribution box 3-pole

Link to Product**Illustration**

Product may differ from Image

**Form**

Form 88521

Technical Data

Operating voltage max. 50 V AC/60 V DC

Operating voltage (only UL listed) max. 30 V AC/DC

Rated surge voltage 0.8 kV

Operating current per contact	max. 4 A
Material group	IEC 60664-1, category I
Coding	A-coded
Locking of ports	Screw thread (M8/M12x1 mm) recommended torque 0.4/0.6 Nm, self-securing
Protection	IP67 inserted and tightened (EN 60529)
Material	PUR
Locking material	Zinc die casting, matte nickel plated
Compression gland	M8 (SW9), M12 (SW13)

General data

Pollution Degree	3
Temperature range	-25...+85 °C
Test isolation voltage	0.8 kV eff/rms

Product article number of manufacturer 7000-88521-0000000