


7/8"-BULKHEAD FLANGE PLUG 5 POLE


Control cabinet entry system Female - male 7/8" (5-pole)


Link to Product

Illustration



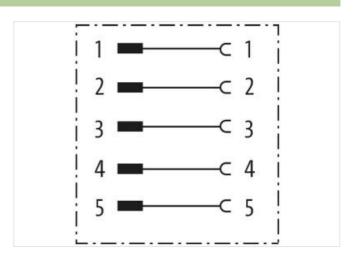



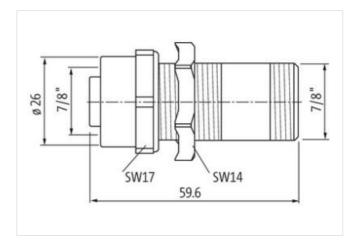

Product may differ from Image

Form	
Form	50111
Technical Data	
Operating voltage	max. 230/400 V AC/DC
Rated surge voltage	3.0 kV
Operating current per contact	max. 12 A
Material group	IEC 60664-1, category I
Locking of ports	Screw thread 7/8" (recommended torque 1.5 Nm) self-securing
Protection	IP67 inserted and tightened (EN 60529)
General data	
Pollution Degree	3
Temperature range	-20+80 °C
Product article number of manufacturer	7000-50111-0000000

The information in this brochure has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-14

Data Sheet for Article 7000-50111-0000000

