



M12 gender-changer female/female 8pole x-cod

for ethernet


Ethernet CAT6A
Control cabinet entry system
Female - female
M12, 8-pole
X-coded
shielded


Link to Product


Illustration

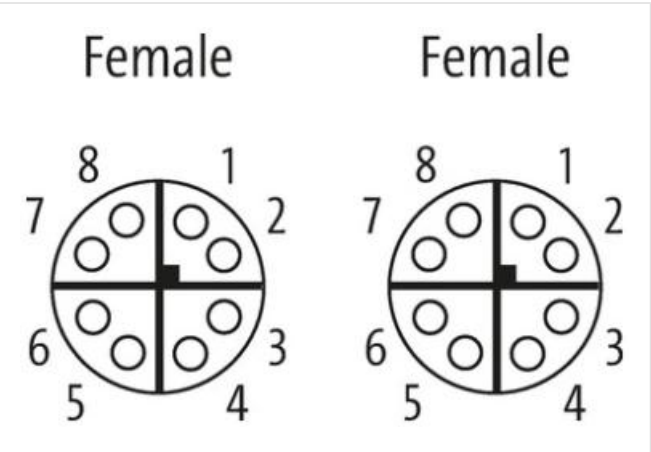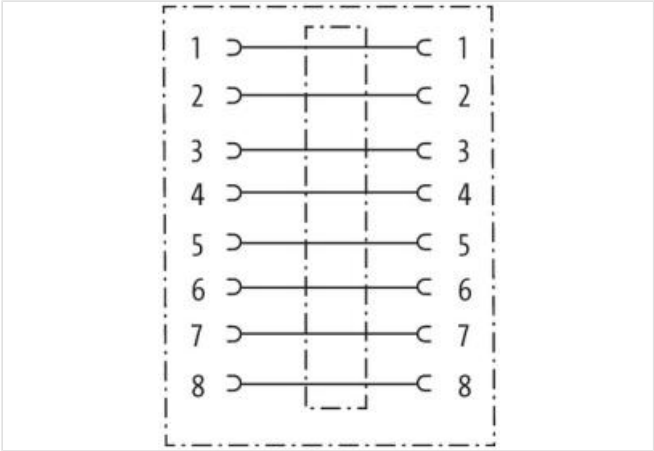


Product may differ from Image

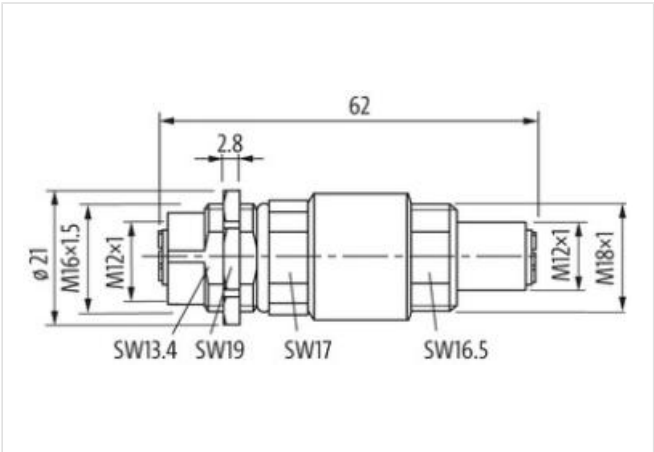







Form

Form 51521

Technical Data

Operating voltage max. 50 V AC/60 V DC

Rated surge voltage	0.8 kV
Operating current per contact	max. 0.5 A
Transfer parameters	CAT6, Class EA (ISO/IEC 11801:2002), (EN 50173-1)
Transfer rate	Gigabit
Material group	IEC 60664-1, category III
Coding	X-coded
Locking of ports	Screw thread (M12×1 mm)
Protection	IP67 inserted and tightened (EN 60529)
Material	Brass, nickel plated
Compression gland	M16 (SW19)

General data

Standards	DIN EN 61076-2-109 (M12)
Temperature range	-40...+85 °C

Product article number of manufacturer	7000-51521-0000000
--	--------------------