

M12 male recept. A-cod. front F&B Pro

PP-wires 5x0.34 0.2m

F&B Pro

Flange male

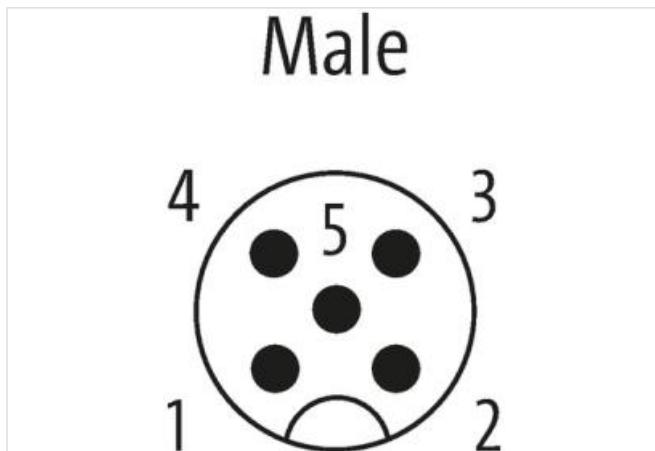
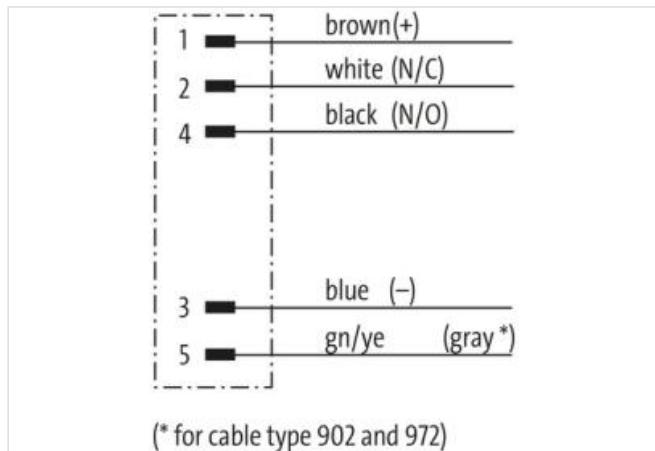
M12, 5-pole

Front mounting

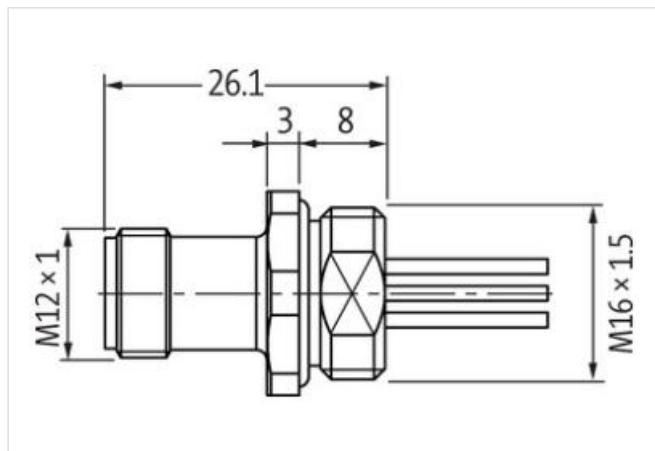
Stainless steel 1.4404 (V4A)

IP69K

Further cable lengths on request.

[Link to Product](#)**Illustration**

Product may differ from Image

**Form**

Form

13521

Technical Data

The information in this brochure has been compiled with the utmost care.

Liability for the correctness, completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-14

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

| | |
|--|--|
| Operating voltage | max. 125 V AC/DC |
| Rated surge voltage | 1.5 kV |
| Operating current per contact | max. 4 A |
| No. of poles | 5 |
| Material group | IEC 60664-1, category I |
| Coding | A-coded |
| LED display | no |
| Locking of ports | Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing |
| Protection | IP67, IP69K mounted and tightened |
| Locking material | Stainless steel 1.4404 (V4A) |
| Compression gland | M12 (SW14) |
| General data | |
| Pollution Degree | 3 |
| Temperature range | -40...+105 °C, depending on cable quality |
| Cables | |
| No./diameter of wires | 5× 0.34 mm ² |
| Wire isolation | PUR (br, wh, bl, bk, gr) |
| Outer Ø | 1.3 mm ±5% |
| Cable number | 972 |
| Material (wire) | Cu wire, tin plated |
| Resistor (core) | max. 58 Ω/km (20 °C) |
| Nominal voltage | 300 V AC |
| Test voltage | 1500 V AC |
| Temperature range (fixed) | -40...+90 °C |
| Temperature range (mobile) | -25...+90 °C |
| Product article number of manufacturer | 7024-13521-9720020 |
| Cable length | 0,2 m |