



Adaptor M12 female / M12 female B-cod. shiel.

2-pol., Profibus


Adapter
Female - female
M12 – M12, 2-pole
B-coded
shielded

Link to Product

Illustration

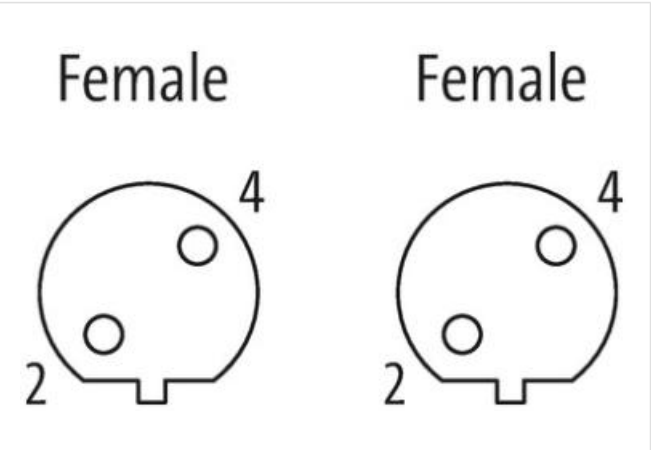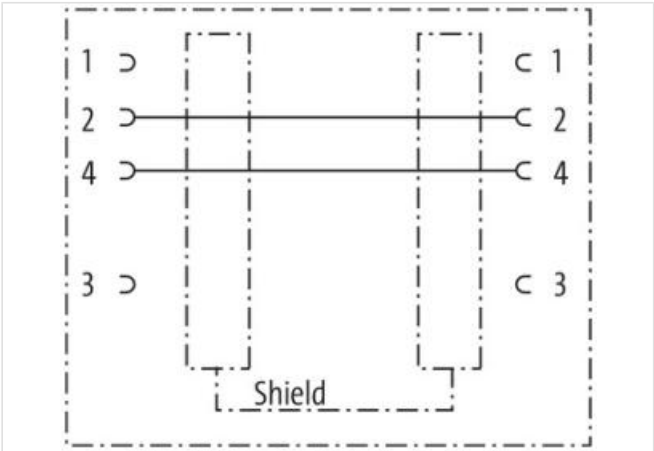

Product may differ from Image

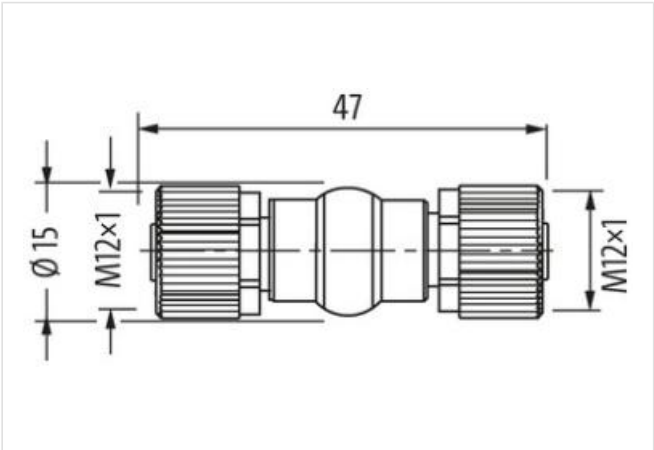

Form

Form 44221

Technical Data

Operating voltage	max. 60 V AC/DC
Operating voltage (only UL listed)	max. 30 V AC/DC
Rated surge voltage	1.5 kV

Operating current per contact	max. 4 A
Locking of ports	Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing
Protection	IP67 inserted and tightened (EN 60529)
Material	PUR
Locking material	Zinc die casting, matte nickel plated

General data

Temperature range	-25...+85 °C
Test isolation voltage	0.8 kV eff/rms

Product article number of manufacturer	7000-44221-0000000
----------------------------------------	--------------------