
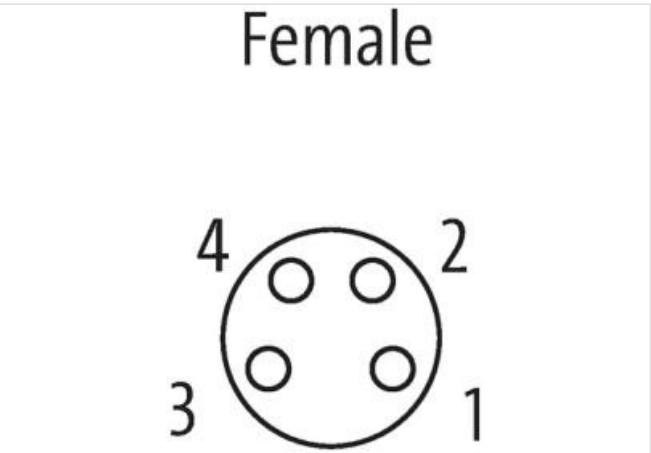


REPLACED BY 7000-08581-9690020


Flange female  
M8, 4-pole  
Front mounting  
with multi-strand wire

Link to Product

Illustration

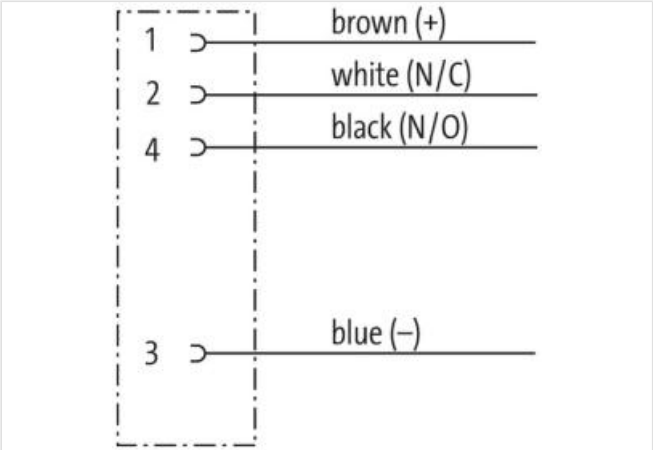

Product may differ from Image

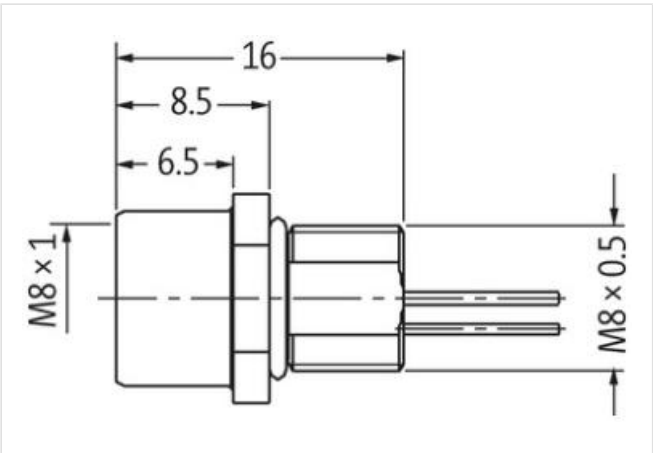

Form

Form 08581

Technical Data

Operating voltage	max. 50 V AC/60 V DC
Rated surge voltage	1.5 kV
Operating current per contact	max. 4 A
Locking of ports	Screw thread (M8x1 mm) recommended torque 0.4 Nm, self-securing

Protection	IP67 inserted and tightened (EN 60529)
------------	--

Protection NEMA	3, 4, 6P (UL 50E)
-----------------	-------------------

**General data**

Temperature range	-25...+85 °C
-------------------	--------------

**Cables**

No./diameter of wires	4× 0.34 mm <sup>2</sup>
-----------------------	-------------------------

Wire isolation	PUR
----------------	-----

Outer Ø	1.3 mm ±5%
---------	------------

Cable number	971
--------------	-----

Temperature range (fixed)	-40...+90 °C
---------------------------	--------------

Temperature range (mobile)	-25...+90 °C
----------------------------	--------------

Bend radius (fixed)	5× outer Ø
---------------------	------------

Product article number of manufacturer	7000-08581-9710020
--	--------------------

Cable length	0,2 m
--------------	-------