




Adaptor M12 male / M8 female A-cod. Lite

3-pol.

Adapter
Male - female
M12 – M8, 3-pole
for M12 distribution box, 3-pole
7005 - plastic hexagonal screw (M12/M8 Lite)

Link to Product

Illustration

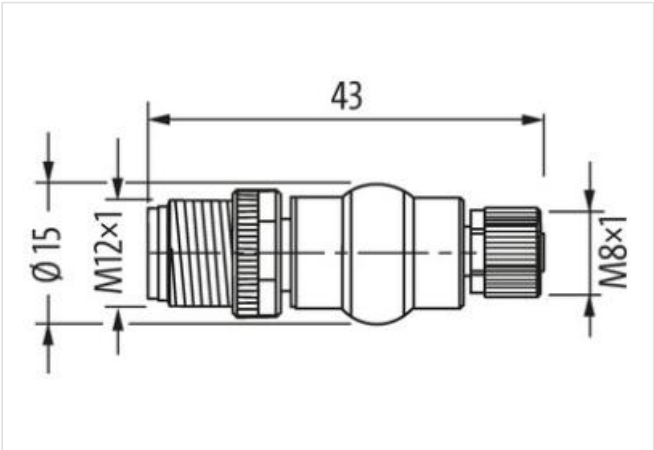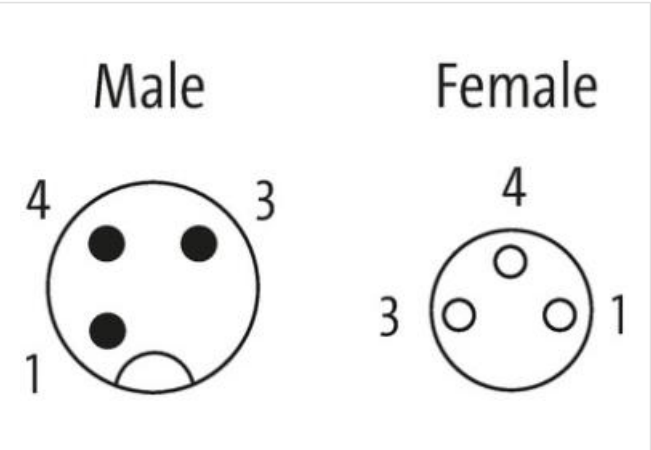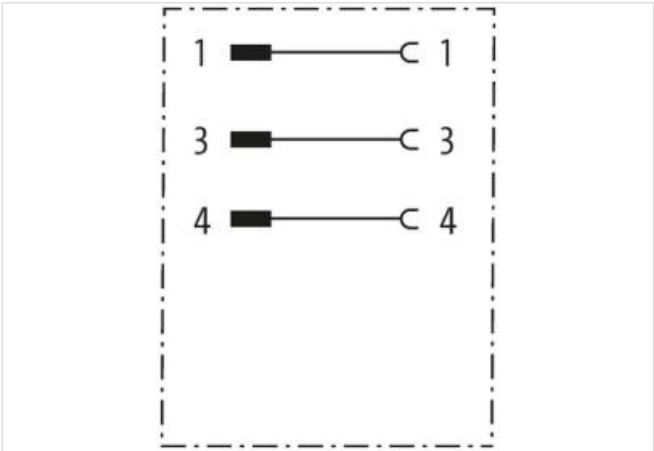

Product may differ from Image



Form

Form 42201

Technical Data

Operating voltage	max. 50 V AC/60 V DC
Operating voltage (only UL listed)	max. 30 V AC/DC
Rated surge voltage	1.5 kV

Operating current per contact	max. 4 A
No. of poles	3
Material group	IEC 60664-1, category I
Coding	M12, A-coded
Locking of ports	Screw thread (M8/M12×1 mm) recommended torque 0.4/0.6 Nm, self-securing
Protection	IP67 inserted and tightened (EN 60529)
Material	PUR
Locking material	PA
suitable for corrugated tube (internal Ø)	without
Compression gland	M8 (SW9), M12 (SW13)

General data

Standards	DIN EN 61076-2-101 (M12), DIN EN 61076-2-104 (M8)
Pollution Degree	3
Temperature range	-25...+85 °C
Test isolation voltage	0.8 kV eff/rms

Product article number of manufacturer	7005-42201-0000000
----------------------------------------	--------------------