

CUBE67+ BUS NODE

Ethernet/IP



Cube67+  
EtherNet/IP  
adjustable via Machine Options Management (MOM)  
Variables for input/output data  
I/O-Mapping  
I/O-Check  
Connection cables are in the online shop under "Connection Technology".  
Housing fully potted.

Link to Product

Illustration



Product may differ from Image

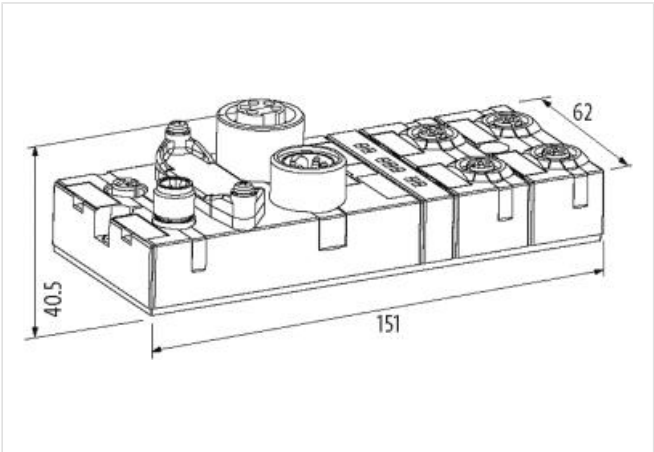

General data	
Mounting method	2-hole screw mounting
Temperature range	0...+55 °C (storage temperature -20...+75 °C)
Protection	IP67
Dimensions HxWxD	151x62x40.5 mm
Module supply	
Operating voltage	24 V DC (EN 61131-2)
Current consumption	max. 200 mA
Cube system	
Module capacity	max. 32
Machine Option Management	yes
No. of masterports (IO-Link)	max. 128
I/O capacity	max. 504 Byte (Input), max. 500 Byte (Output)
Connections	
Fieldbus	Ethernet 10/100 Mbit/s; M12, D-coded
Sensor-system/actuator supply	7/8", 5-pole, 2x max. 8 A
Internal system connection	4x M12 (female) A-coded, 6-pole, 2x max. 4 A

EtherNet/IP	
Addressing	DHCP, BOOTP or IP address by rotary switch
Product article number of manufacturer	56535
Diagnostic	
Communication status	via LED and BUS
Diagnostic via LED	per module and channel
Diagnostic via BUS	per module and channel
Monitoring - under voltage	yes
Monitoring - no voltage	yes
Short-circuit and overload	yes