

CUBE67+ BUS NODE

ProfiNet IO

Cube67+
PROFINET IO


Connection cables are in the online shop under "Connection Technology".
Housing fully potted.

[Link to Product](#)

Illustration



Product may differ from Image

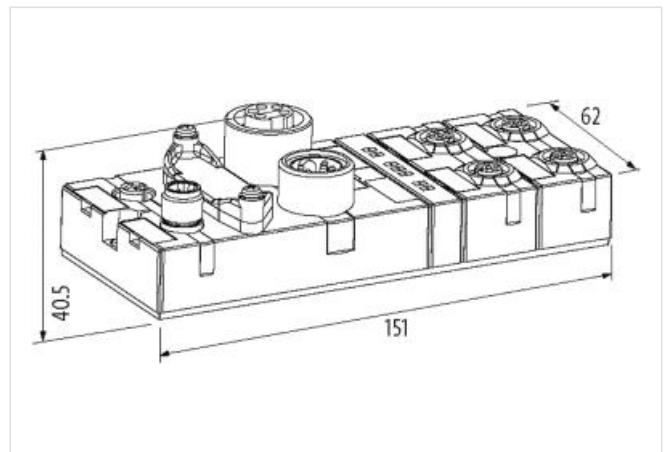

General data

Mounting method	2-hole screw mounting
Temperature range	0...+55 °C (storage temperature -20...+75 °C)
Protection	IP67
Dimensions HxWxD	151x62x40.5 mm

Module supply

Operating voltage	24 V DC (EN 61131-2)
Current consumption	max. 200 mA

Cube system

Module capacity	max. 32
Machine Option Management	yes
No. of masterports (IO-Link)	max. 128
I/O capacity	max. 1 024 Byte (Input), max. 1 024 Byte (Output)

Connections

Fieldbus	Ethernet 10/100 Mbit/s; M12, D-coded
Sensor-system/actuator supply	7/8", 5-pole, 2x max. 8 A
Internal system connection	4x M12 (female) A-coded, 6-pole, 2x max. 4 A

PROFINET

Specification	V2.2, Conformance Class B
Addressing	DCP

Product article number of manufacturer 56526

Diagnostic

Communication status	via LED and BUS
Diagnostic via LED	per module and channel
Diagnostic via BUS	per module and channel
Monitoring - under voltage	yes
Monitoring - no voltage	yes
Short-circuit and overload	yes