

CUBE67+ BUS NODE


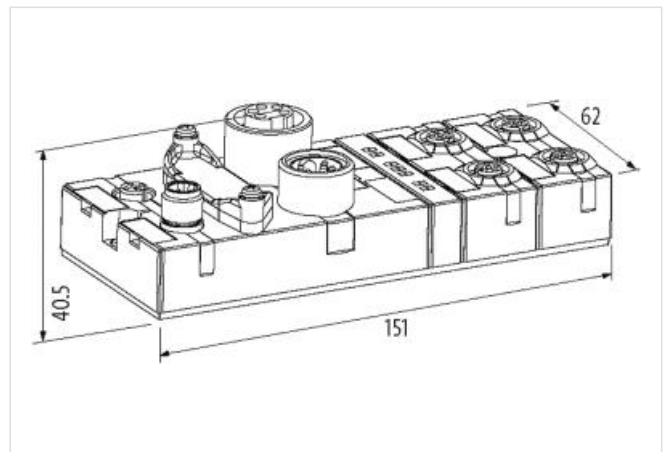
Ethernet/IP

Cube67+
EtherNet/IP

Connection cables are in the online shop under "Connection Technology".
Housing fully potted.

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Mounting method	2-hole screw mounting
Temperature range	0...+55 °C (storage temperature -20...+75 °C)
Protection	IP67
Dimensions HxWxD	151x62x40.5 mm

Module supply

Operating voltage	24 V DC (EN 61131-2)
Current consumption	max. 200 mA

Cube system

Module capacity	max. 32
-----------------	---------

Connections

Fieldbus	Ethernet 10/100 Mbit/s; M12, D-coded
Sensor-system/actuator supply	7/8", 5-pole, 2x max. 8 A
Internal system connection	4x M12 (female) A-coded, 6-pole, 2x max. 4 A

EtherNet/IP

Addressing	DHCP, BOOTP or IP address by rotary switch
------------	--

Product article number of manufacturer	56525
--	-------

Diagnostic

Communication status	via LED and BUS
----------------------	-----------------

Diagnostic via LED	per module and channel
Diagnostic via BUS	per module and channel
Monitoring - under voltage	yes
Monitoring - no voltage	yes
Short-circuit and overload	yes