

CUBE67 BUS NODES

DeviceNet

DeviceNet

Connection cables are in the online shop under "Connection Technology".



Housing fully potted.

[Link to Product](#)

Illustration



Product may differ from Image

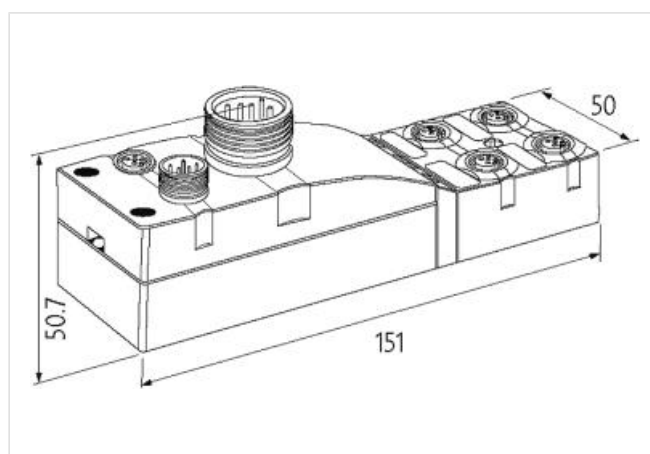

General data

Mounting method	2-hole screw mounting
Temperature range	0...+55 °C (storage temperature -20...+75 °C)
Protection	IP67
Dimensions H×W×D	151×50×50.3 mm

Module supply

Operating voltage	24 V DC (EN 61131-2)
Current consumption	max. 70 mA

Cube system

Module capacity	max. 16
-----------------	---------

Connections

Fieldbus	DN 125 kbit/s; 250 kbit/s; 500 kbit/s; M12, A-coded
Sensor-system/actuator supply	7/8", 5-pole, max. 9 A
Internal system connection	M12, 6 pole; max. 4 A

Product article number of manufacturer	56507
--	-------

Diagnostic

Communication status	via LED and BUS
Diagnostic via LED	per module and channel
Diagnostic via BUS	per module and channel
Monitoring - under voltage	yes
Monitoring - no voltage	yes

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Short-circuit and overload	yes
----------------------------	-----