

Cube67 Valve-Interface, I/O Extension Module

DO32, MAC Valves, D-Sub HD44F 44 pol.,

Expansion module

Cube67 DO32 E - Valve

Multipole plug (0.5 A)


MAC - SUB-D44

Connection cables are in the online shop under "Connection Technology".

Housing fully potted.

Link to Product

Illustration

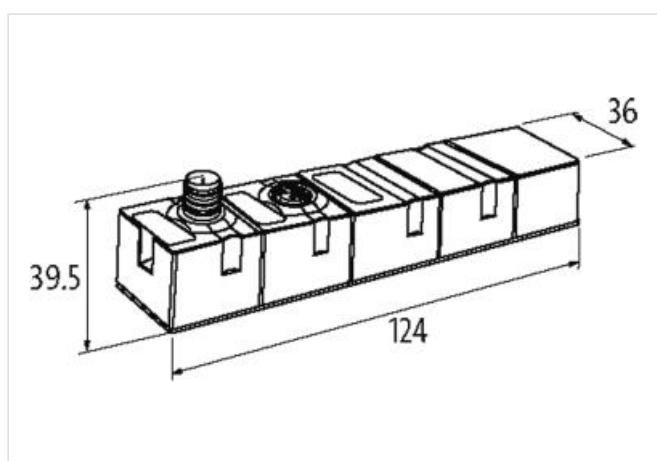

Product may differ from Image

General data

Mounting method	2-hole screw mounting
Temperature range	0...+55 °C (storage temperature -20...+70 °C)
Protection	IP67
Dimensions HxWxD	124x36x39.5 mm

Output

Actuator supply UA	24 V DC (EN 61131-2)
Switching current per output	max. 0.5 A (short-circuit and overload protected)

Internal communication

LED display	US: sensor supply and internal supply voltage (green: OK); UA: actuator supply (green: OK)
Current consumption	max. 50 mA

Connections

Fieldbus	via internal system connection
Sensor-system/actuator supply	via internal system connection (max. 2x 4 A)
I/O ports	MAC - SUB-D44

Product article number of manufacturer 56657

Diagnostic

Communication status	via LED
Diagnostic via LED	per module
Diagnostic via BUS	per module and channel
Actuator warning	per channel via BUS
Monitoring - under voltage	yes
Monitoring - no voltage	yes

Short-circuit and overload yes