

CUBE20/67 INTERFACE

Cube20/67 system connection


Connection cables are in the online shop under "Connection Technology".

[Link to Product](#)

Illustration



Product may differ from Image

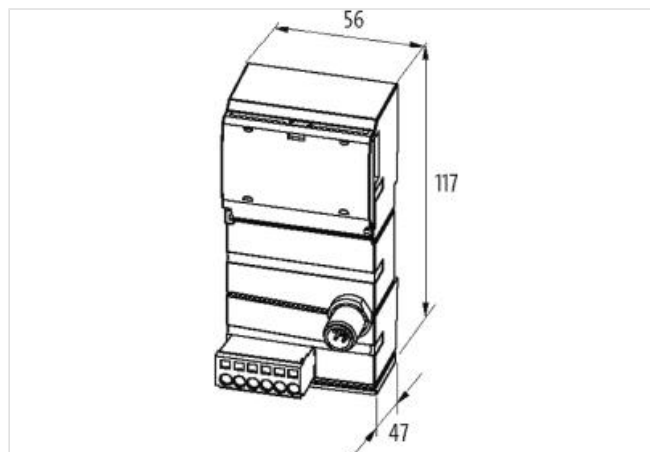

General data

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	0...+55 °C (storage temperature -20...+85 °C)
Protection	IP20
Dimensions H×W×D	117×56×47 mm

Module supply

Operating voltage	24 V DC (EN 61131-2)
Current consumption	max. 25 mA

Cube system

Module capacity	max. 15
Sensor supply US	24 V DC (18...30.2 V DC) EN 61131-2, max. 4 A
Actuator supply UA	24 V DC (18...30.2 V DC) EN 61131-2, max. 4 A

Connections

Fieldbus	M12 (female) 6-pole
Sensor-system/actuator supply	4× spring clamp plug-in terminals, max. 2.5 mm ² (max. 12 A)
I/O ports	8× spring clamp plug-in terminals, max. 2.5 mm ²

Product article number of manufacturer	56140
--	-------

Diagnostic

Communication status	via LED
----------------------	---------