

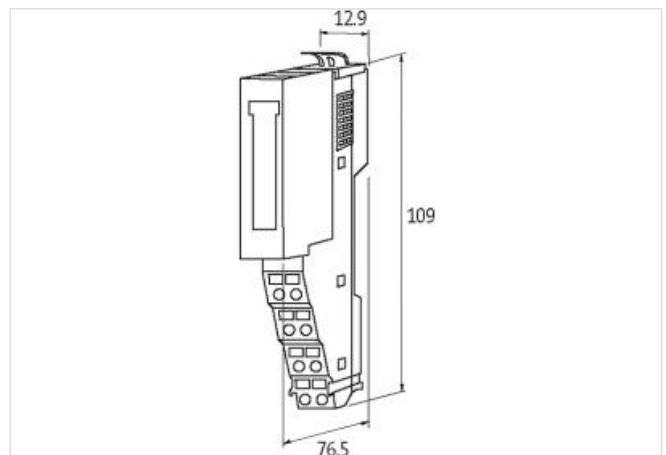
CUBE20S ANALOG INPUT MODULE AI2

2X16Bit (I 0(4)...20mA)

Expansion module
AI2 - (E) U
Current

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	0...+60 °C (storage temperature -25...+70 °C)
Protection	IP20
Connection	Spring clamp plug-in terminals: max. 1.5 mm ² (AWG 16)
Dimensions H×W×D	109×12.9×76.5 mm

Input

Connection	Differential current input
Accuracy	max. 0.3%
Conversion time (analog)	240 µs (all channels)
Resolution (analog)	15 Bit + sign

Internal communication

Current consumption	max. 60 mA from system, max. 15 mA externally (UI)
Module supply	via system connection

Product article number of manufacturer	57232
--	-------

Diagnostic

Communication status	via LED
Diagnostic via LED	per module and channel
Diagnostic via BUS	per module
Monitoring - under voltage	yes
Monitoring - no voltage	no

Wire break upper/lower limit overload	per module via LED and BUS
Short-circuit and overload	yes