

## MASI00 I/O MODULE

4 digital inputs, 4 digital outputs

Digital inputs/outputs

DI4/DO4 - 0.2 A


IP00

### [Link to Product](#)

#### Illustration



Product may differ from Image

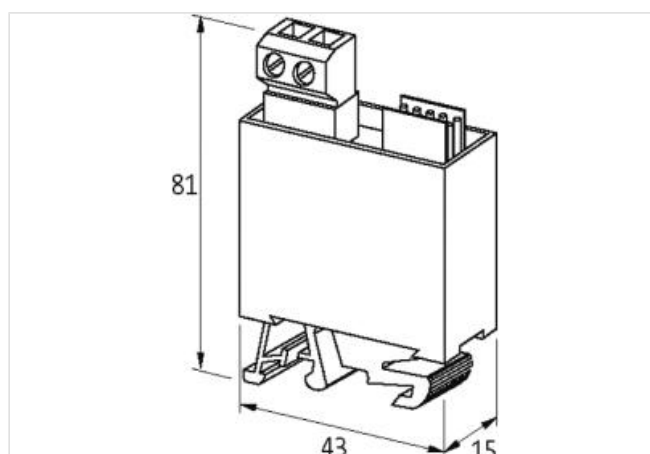

#### Technical Data

Total current (AS-Interface)	max. 250 mA
Bus voltage (AS-Interface)	26.5...31.6 V DC
Profile (IO/ID/ID2 code)	S-7.F.F
Addressing	1...31 via plug terminals
Address range	1...31

#### General data

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	0...+55 °C (storage temperature -20...+70 °C)
Connection AS-Interface	Screw plug-in terminal: 0.2...2.5 mm <sup>2</sup>
Protection	IP00
Dimensions HxWxD	43x15x81 mm

#### Output

Switch off time in case of short circuit	approx. 50 ms
Total current	max. 200 mA
Switching current per output	max. 0.2 A (short-circuit and overload protected)

#### Input

Sensor supply US	max. 200 mA from AS-Interface (short-circuit and overload protected)
Type	for standard switches

Product article number of manufacturer	55700
--	-------

#### Diagnostic

Communication status	via LED
Diagnostic via LED	per module
Monitoring - no voltage	yes