

MASI65 VALVE PLUG PLUG

2 digital inputs, 2 digital outputs

Digital inputs/outputs

DI2 - 0.2 A (M12)


DO2 - 2 A (Form A/M12)

[Link to Product](#)

Illustration



Product may differ from Image

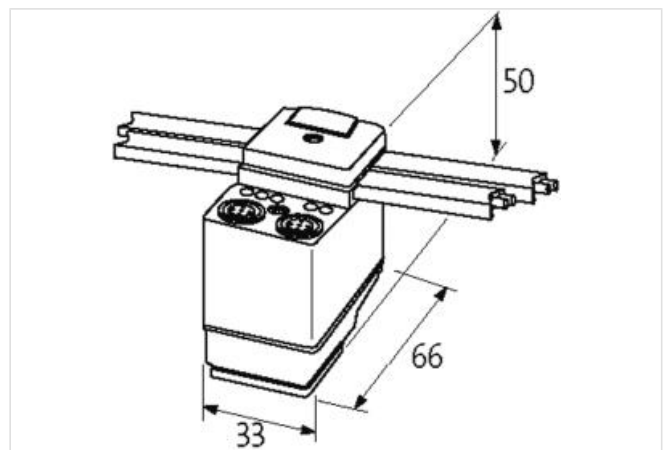

Technical Data

Total current (AS-Interface)	max. 250 mA
Bus voltage (AS-Interface)	26.5...31.6 V DC
Profile (IO/ID/ID2 code)	S-3.F.E
Addressing	1...31 via address port
Pin spacing	18 mm

General data

Temperature range	-20...+70 °C (storage temperature -20...+70 °C)
Protection	IP67
Dimensions H×W×D	50×33×66 mm

Output

Supply voltage	24 V DC external (18...30.2 V DC) EN 61131-2, connection via black AS-Interface profile cable
Connection	OUT 1 (Form A), OUT 2 (M12)
Total current	max. 2 A (only 1 output active)
Switching current per output	max. 2 A (short-circuit and overload protected)

Input

Connection	1 and 2 – M12
Sensor supply US	max. 200 mA from AS-Interface (short-circuit and overload protected)
Type	for 3-wire sensors or mechanical switches, PNP

Product article number of manufacturer 55680

Diagnostic

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Communication status	via LED
Diagnostic via LED	per module
Monitoring - no voltage	yes