


IO-Link / analog converter

AO I 4 ... 20mA, M12, straight


IO-Link / analog converter

AO I 4...20mA, M12

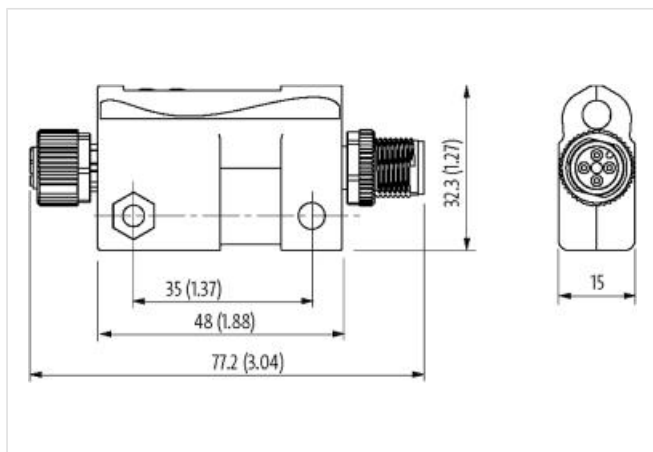
16Bit, IP65/67, IO-Link V1.1, Class A

[Link to Product](#)**Illustration****Male**

PIN 1: +24 V (L+)
 PIN 2: n.c.
 PIN 3: GND
 PIN 4: C/Q, IO-Link

Female

PIN 1: +Us
 PIN 2: n.c.
 PIN 3: GND (Analog Us)
 PIN 4: AOUT (U/I)



Product may differ from Image

**General data**

Temperature range	-30...+70 °C (storage temperature -40...+85 °C)
Material (housing)	Plastic
Labeling	Laser labelled
Protection	IP65/IP67
Dimensions H×W×D	32.3×77.2×15 mm

Module supply

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Operating voltage	24 V DC (18...30 V DC)
Current consumption	max. 19 mA
Output	
Output filter	yes, mean value formation, parameterizable N = 0...64
Type	2-, 3-, 4-wire technology
Resolution (analog)	15 Bit + sign
Over voltage protection	30 V DC
Conversion time (analog)	max. 5 ms
Input range (analog)	4...20 mA
Actuator supply UA	24 V DC (EN 61131-2), max. 200 mA
Valency	348 nA
Temperature drift	45 ppm/K
Accuracy	0.10% (25 °C)
IO-Link	
Data width	16 Bit / 2 Byte
Specification	IO-Link V1.1
Port Class	A
Data format	Siemens S7
Operating modes	COM2 (38.4 kbit/s)
Cycle time	min. 2.3 ms
Parameterization	
Mean value filter	1 Byte
upper limit	2 Byte
lower limit	2 Byte
Measured value	preset
Diagnostics	lower limit, upper limit, over heated, supply over voltage, supply under voltage, defective device, sensor cable break, sensor supply over current, overrun
Connections	
Analog output	M12 (female) 3-pole, A-coded, shielded
IO-Link	M12 (male) 3-pole, A-coded
Protection	
Short-circuit protection sensor	yes, permanently
feed back resistance	yes, permanently
Reverse polarity protection module	yes, permanently
Over voltage protection	30 V DC
Product article number of manufacturer	
5000-00501-2110000	
Diagnostic	
Communication status	via LED and IO-Link
Diagnostic via LED	yes
Diagnostic via IO-Link	yes
Monitoring - under voltage	yes
Monitoring - over voltage	yes
Monitoring - temperature	yes
Underride and overrun	yes
Monitoring - limit	yes