

MVP12-P6 DI16 8xM12A IOLA12 E0

IO-Link Class A Hub

IO-Link hub in 50 mm plastic housing

1 × M12 IO-Link Class A

8 × M12 I/O

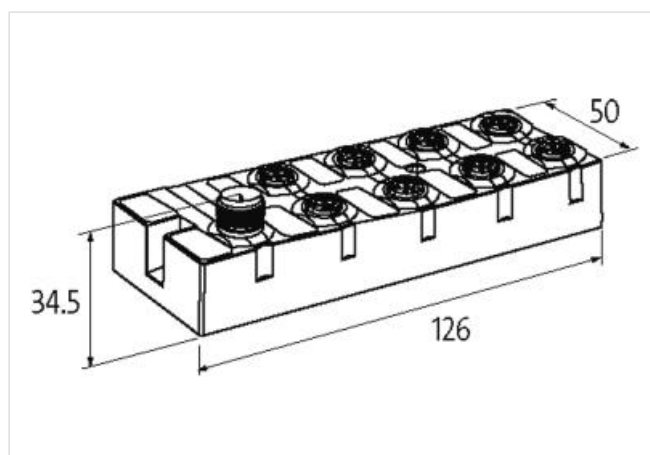
16 digital inputs

Extended parameter range

Connection cables are in the online shop under "Connection Technology".

[Link to Product](#)**Illustration**

Product may differ from Image

**Technical Data**

Installation height max.	max. 3000 m above sea level
Operating voltage (US)	24 V DC (18...30 V DC)
	max. 4 A
Current consumption	max. 40 mA
LED display	US-IOL: sensor power supply IOL (green: OK)

General data

Mounting method	2-hole screw mounting
Temperature range	-25...+70 °C (storage temperature -40...+85 °C)
Protection	IP68
Dimensions H×W×D	126×50×34.5 mm

Input

Type	Type 1 + type 3
Input filter	0...15 ms
	24 V DC (EN 61131-2), max. 0.5 A, short-circuit and overload-protected

IO-Link

Specification	IO-Link V1.1.2, compatible with: IO-Link V1.1.3
Port Class	A
IO-Link	Device
Operating modes	COM3 (230.4 kBaud)
Cycle time	min. 1 ms
	4 bytes (inputs)

Parameterization

PIN 4	Input (port X0...X7)
-------	----------------------

PIN 2	Input (port X0...X7)
-------	----------------------

Connections

IO-Link	M12, 3-pin, A-coded
---------	---------------------

I/O ports	M12, 5-pole, A-coded
-----------	----------------------

Product article number of manufacturer	59810
--	-------

Diagnostic

Communication status	via LED
----------------------	---------

Diagnostic via LED	per module and channel
--------------------	------------------------

Monitoring - under voltage	yes
----------------------------	-----

Monitoring - no voltage	yes
-------------------------	-----

Short-circuit and overload	yes
----------------------------	-----