

## MASI67 I/O MODULE

8 digital inputs

Digital inputs


DI8 - 0.24 A - 8× M8 (AB)

Connection cables are in the online shop under "Connection Technology". Housing fully potted.

## **Link to Product**

## Illustration



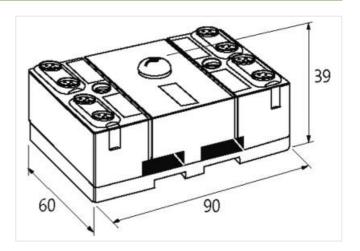

Product may differ from Image





Technical Data	
Total current (AS-Interface)	max. 290 mA
Bus voltage (AS-Interface)	26.531.6 V DC
Profile (IO/ID/ID2 code)	2× S-0.A.0
Addressing	via built-in address port or master
Address range	162 (2× 131 A or B)
General data	
Mounting method	DIN-rail mountable (EN 60715) or screw fixing
Temperature range	-20+60 °C (storage temperature -20+70 °C)
Protection	IP67
Dimensions H×W×D	94×60×39 mm
Input	
Sensor supply US	max. 240 mA from AS-Interface (short-circuit and overload protected)
Туре	for 3-wire sensors or mechanical switches, PNP
Product article number of manufacturer	56406
Diagnostic	
Communication status	via LED
Diagnostic via LED	per module
Monitoring - no voltage	yes