

MASI67 INSTALLATION TECHNOLOGY


Converter 2x profile cable to 7/8" male


MASI67 converter 2× profile cable to 7/8" (male) Connection cables are in the online shop under "Connection Technology".

Link to Product

Illustration



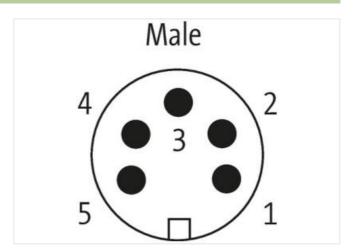



Product may differ from Image



Technical Data	
Operating voltage	max. 36 V DC
Total current	max. 8 A
General data	
Mounting method	DIN-rail mountable (EN 60715) or screw fixing
Temperature range	-20+60 °C (storage temperature -40+80 °C)
Test isolation voltage	AS-Interface/Power 200 V, (EN 60664-1)

The information in this brochure has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13



Protection	IP67
Dimensions H×W×D	90×74×46 mm
Contact Layout	
PIN 1	AS-Interface + (brown)
PIN 2	AS-Interface - (blue)
PIN 3	n.c.
PIN 4	+24 V (brown)
PIN 5	0 V (blue)
Product article number of manufacturer	55036