


MASI20 INSTALLATION TECHNOLOGY

Distributor AS-I and extern power, 3 potentials

- 5 ports, universal
- 3 potentials
- 5 plug terminals included

[Link to Product](#)

Illustration

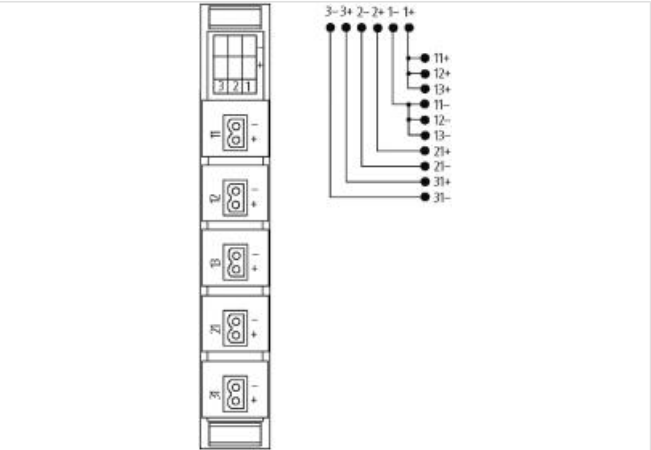

Product may differ from Image



Technical Data	
Operating voltage	max. 36 V DC
Current per connection	max. 8 A
Total current	max. 12 A
General data	
Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+70 °C

Test isolation voltage	AS-Interface/Power 200 V, Power/Power 50 V (EN 60664-1)
Protection	IP20
Connection	Screw terminal: single wire (0.2...2.5 mm ²), stranded wire (0.2...1.5 mm ²)
Dimensions H×W×D	25×61×152 mm
Product article number of manufacturer	55605