

EXACT8, 6XM8, 3 POLE BASIC HOUSING

Without homerun-cable

6-way, 3-pole



Inline face or side mounting

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)

Illustration

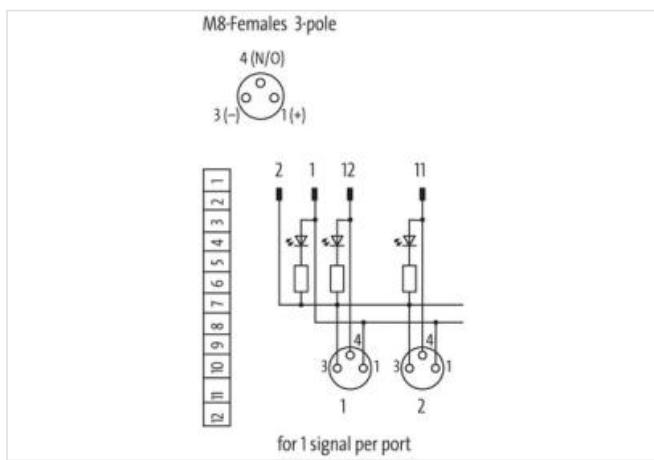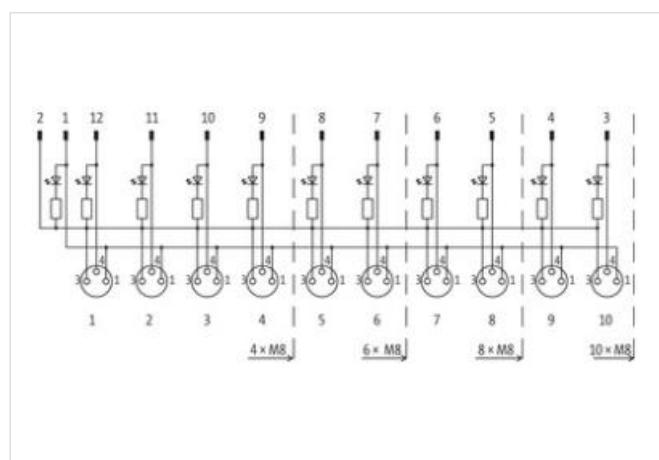

Product may differ from Image



Technical Data

Operating voltage 24 V DC

Operating current per contact max. 2 A

Protection IP65/IP67

Total current max. 8 A

General data

The information in this brochure has been compiled with the utmost care.

Liability for the correctness, completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Temperature range -20...+70 °C, depending on cable quality

Contact Layout

PIN 1	(+)
PIN 3	(-)
PIN 4	(NO)/(S1)
	LED (green): Power / LED (yellow): (S1)

Product article number of manufacturer 8000-86000-0000000