

**MASI68 DI4/0,19A DO4/2A 8xM12**

Compact module

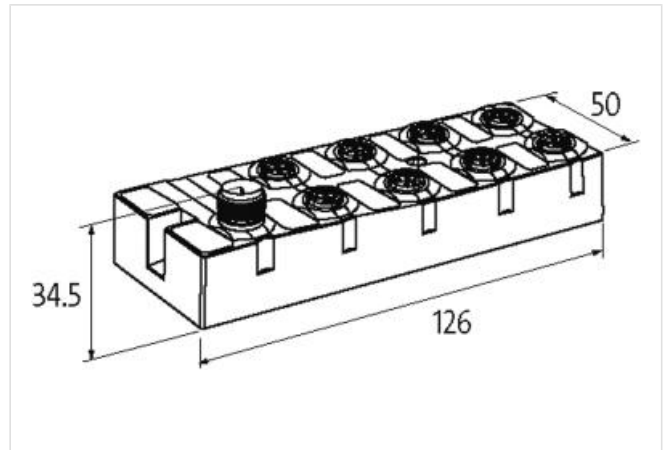
DI4 - 0.2 A DO4 - 2 A (C) - 8x M12

Connection cables are in the online shop under "Connection Technology".

Housing fully potted.

[Link to Product](#)
**Illustration**

Product may differ from Image

**Technical Data**

ASI-Power 24	yes
Bus voltage (AS-Interface)	26.5...31.6 V DC
Profile (IO/ID/ID2 code)	S-7.0.7
Addressing	via master or M12 connection and programming device
Address range	1...31
Total current	max. 250 mA

**General data**

Mounting method	screw fixing
Temperature range	-20...+60 °C (storage temperature -20...+70 °C)
Protection	IP68
Dimensions HxWxD	126x50x34.5 mm

**Output**

Total current	max. 4 A
Switching current per output	max. 2 A (short-circuit and overload protected)

**Input**

Sensor supply US	max. 200 mA from AS-Interface (short-circuit and overload protected)
Type	for 3-wire sensors or mechanical switches, PNP

**Connections**

Fieldbus	A-coded
I/O ports	M12, 5-pole

Product article number of manufacturer 56438

**Diagnostic**

Communication status via LED

Diagnostic via LED per module

Monitoring - no voltage yes