

**EXACT8, 10XM8, 3 POLE PLUG. CAP, SPRING-TERM.**

3.0m PUR 10\*0,34+2\*0,75 exit norm..

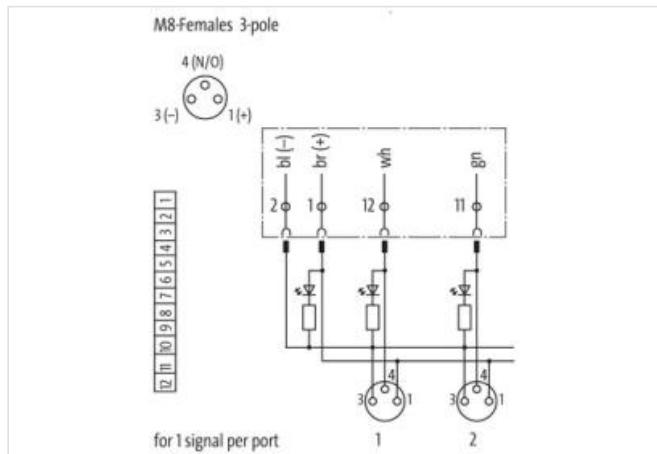
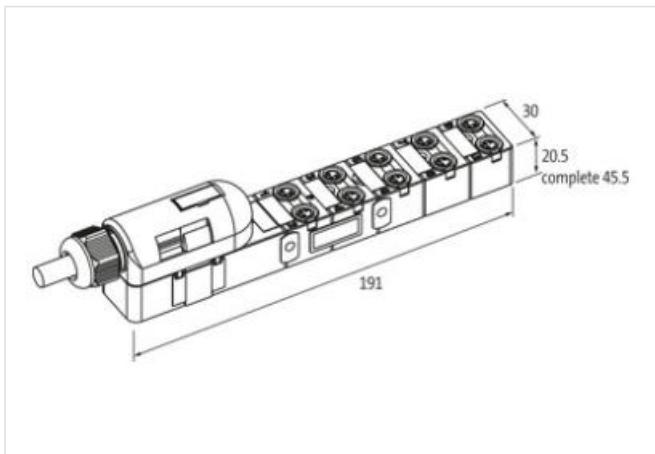
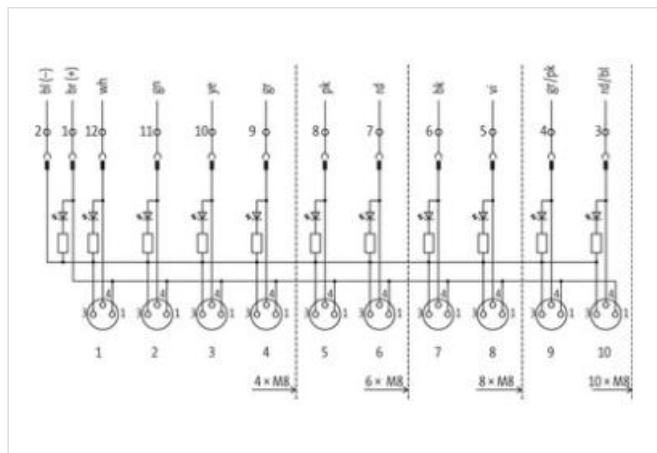
3.0 m

10-way, 3-pole

Further cable lengths on request.

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

**Link to Product****Illustration**

Product may differ from Image

**Form**

Form 80040

**Technical Data**

Operating voltage 24 V DC

Operating current per contact max. 2 A

Locking of ports Screw thread (M8x1 mm)

The information in this brochure has been compiled with the utmost care.

Liability for the correctness, completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Connection	Spring clamp plug-in terminals: max. 1.5 mm <sup>2</sup> (AWG 16)
Protection	IP67 inserted and tightened (EN 60529)
Housing	Plastic, flame retardant
Signal per port	1 - (31-32)
Total current	max. 8 A

**General data**

Temperature range	-20...+80 °C, depending on cable quality
-------------------	--

**Cables**

No./diameter of wires	10x 0.34 + 2x 0.75 mm <sup>2</sup>
C-track properties	5 Mio.
Outer Ø	9.3 mm ±5%
Cable number	384
Approval (cable)	UL (AWM-Style 20233/10042), CSA; CE conform
Color (jacket)	gray
Jacket Color	gray
Temperature range (fixed)	-40...+80 °C
Temperature range (mobile)	-5...+60 °C
Bend radius (fixed)	5x outer Ø
Bend radius (moving)	10x outer Ø
Material (jacket)	PUR (UL/CSA)

**Contact Layout**

PIN 1	(+)
PIN 3	(-)
PIN 4	(NO)/(S1)
LED (green): Power / LED (yellow): (S1)	

Product article number of manufacturer	8000-80040-3840300
--	--------------------