



EXACT8, 4XM8, 4 POLE BASIC HOUSING

Without homerun-cable

4-way, 4-pole
Inline face or side mounting
Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product

Illustration

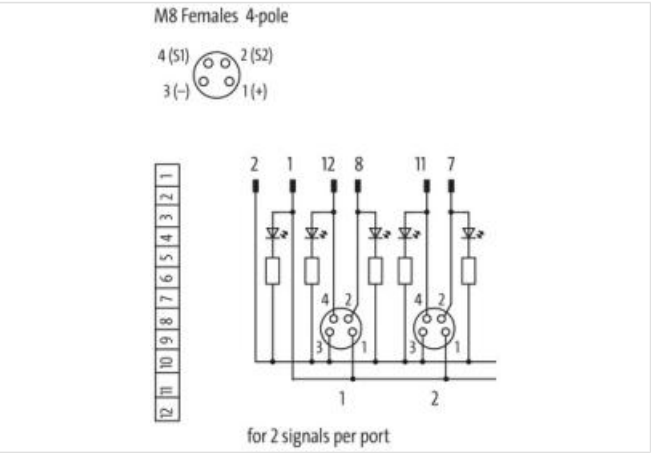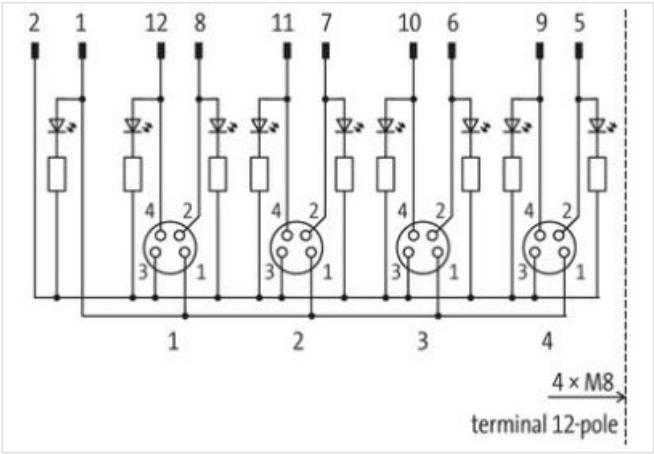

Product may differ from Image



Technical Data	
Operating voltage	24 V DC
Operating current per contact	max. 2 A
Protection	IP65/IP67
Total current	max. 8 A
General data	

Temperature range -20...+70 °C, depending on cable quality

Contact Layout	
PIN 1	(+)
PIN 2	(NC)/(S2)
PIN 3	(-)
PIN 4	(NO)/(S1)
LED (green): Power / LED (yellow): (S1) / LED (white): Signal (S2)	
Product article number of manufacturer	8000-84100-0000000