


MASI67 INSTALLATION TECHNOLOGY

Connection 2x profile- to 2x profile cable

MASI67 connection 2× on 2× profile cable

Link to Product

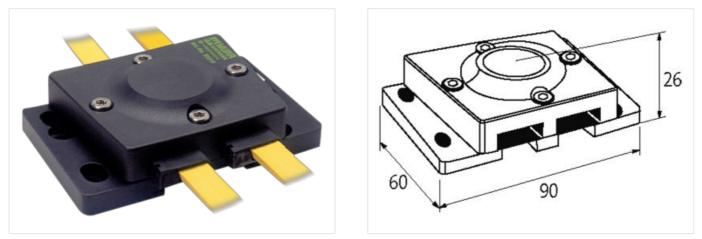

Product may differ from Image



Technical Data	
Operating voltage	max. 36 V DC
Total current	max. 8 A
General data	
Mounting method	DIN-rail mountable (EN 60715) or screw fixing
Temperature range	-20+60 °C (storage temperature -40+80 °C)
Test isolation voltage	AS-Interface/Power 200 V, (EN 60664-1)
Protection	IP67
Dimensions H×W×D	90×74×26 mm

Product article number of manufacturer 55033

The information in this brochure has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com