


EXACT8, 4XM8, 3 POLE

Conn.M12 12 pole

4-way, 3-pole
M12 (12-pole)
Inline face or side mounting
Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product

Illustration

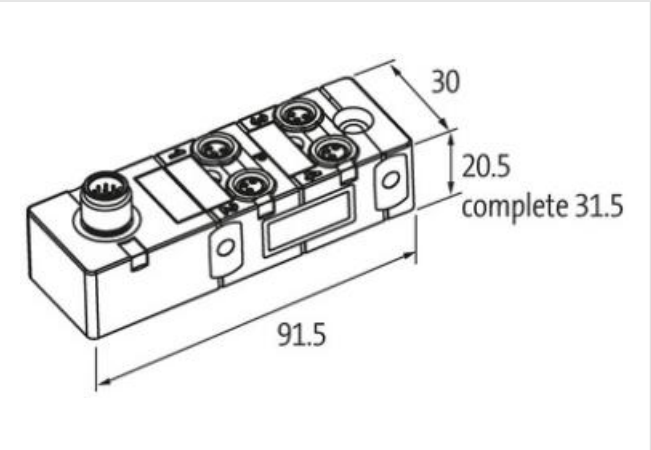

Product may differ from Image



Technical Data	
Operating voltage	24 V DC
Operating current per contact	max. 1.5 A
Protection	IP67 inserted and tightened (EN 60529)
Housing	Plastic, flame retardant

General data

Temperature range	-20...+70 °C, depending on cable quality
-------------------	--

Contact Layout

PIN 1	(+)
-------	-----

PIN 3	(-)
-------	-----

PIN 4	(NO)/(S1)
-------	-----------

	LED (green): Power / LED (yellow): (S1)
--	---

Product article number of manufacturer	8000-84060-0000000
--	--------------------