



EXACT8, 6XM8, 4 POLE BASIC HOUSING

Without homerun-cable

6-way, 4-pole  
Inline face or side mounting  
Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product

Illustration

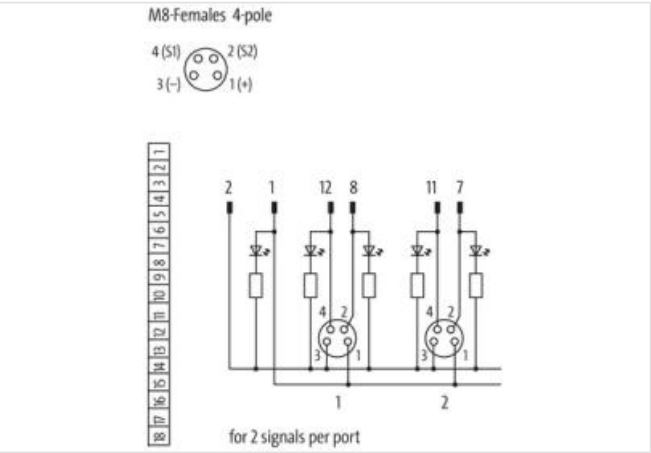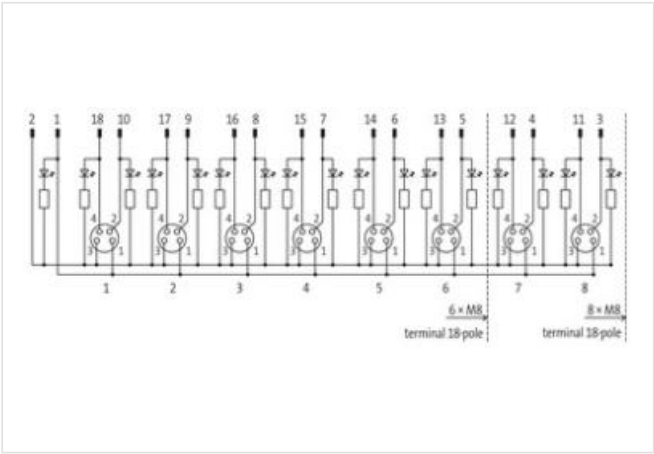

Product may differ from Image



| Technical Data                |           |
|-------------------------------|-----------|
| Operating voltage             | 24 V DC   |
| Operating current per contact | max. 2 A  |
| Protection                    | IP65/IP67 |
| Total current                 | max. 8 A  |
| General data                  |           |

Temperature range -20...+70 °C, depending on cable quality

| Contact Layout   |                    |
|--|--------------------|
| PIN 1  | (+)                |
| PIN 2  | (NC)/(S2)          |
| PIN 3  | (-)                |
| PIN 4  | (NO)/(S1)          |
| LED (green): Power / LED (yellow): (S1) / LED (white): Signal (S2) |                    |
| Product article number of manufacturer                             | 8000-86100-0000000 |