

EXACT8, 10XM8, 4 POLE MOULDED CABLE

3.0m PUR/PVC 20x0,34+2x0,75

PUR/PVC

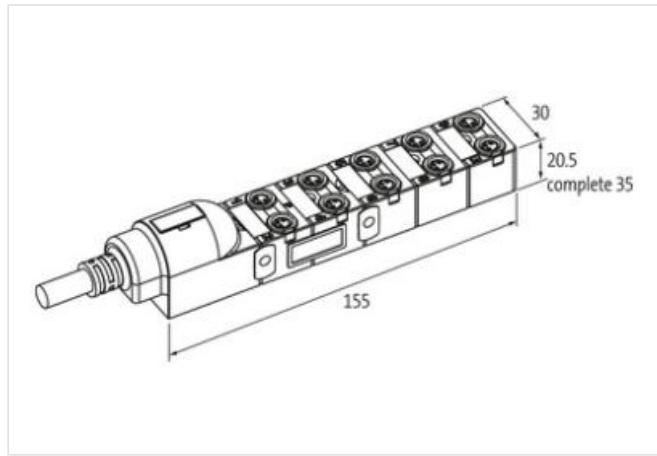
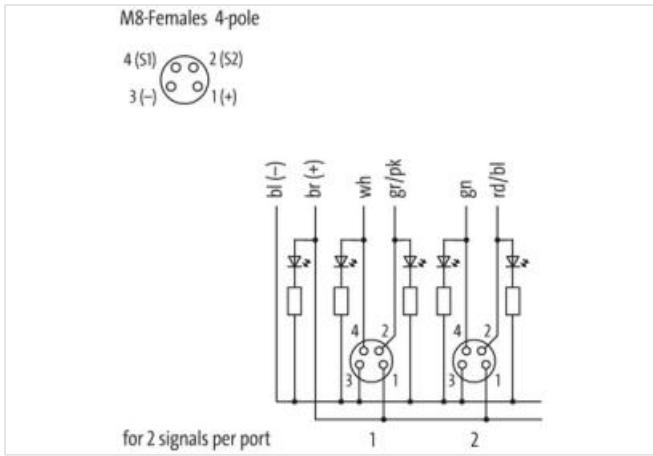
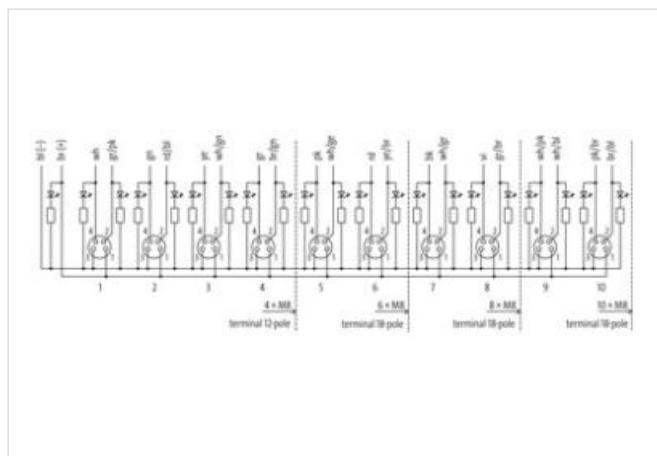
10-way, 4-pole

3.0 m

Further cable lengths on request.

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

Product may differ from Image

**Form**

Form 80110

Technical Data

Operating voltage 24 V DC

Operating current per contact max. 2 A

The information in this brochure has been compiled with the utmost care.

Liability for the correctness, completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Locking of ports	Screw thread (M8×1 mm)
Protection	IP65/IP67
Housing	Plastic, flame retardant
Signal per port	2
Total current	max. 8 A

General data

Temperature range	-20...+80 °C, depending on cable quality
-------------------	--

Cables

No./diameter of wires	20x 0.34 + 2x 0.75 mm ²
Wire isolation	PVC
C-track properties	1.5 Mio.
Outer Ø	10.4 mm ±5%
Cable number	412
Jacket Color	gray
Temperature range (fixed)	-30...+70 °C
Temperature range (mobile)	-5...+60 °C
Bend radius (fixed)	10x outer Ø
Bend radius (moving)	12x outer Ø
Material (jacket)	PUR/PVC

Contact Layout

PIN 1	(+)
PIN 2	(NC)/(S2)
PIN 3	(-)
PIN 4	(NO)/(S1)
LED (green): Power / LED (yellow): (S1) / LED (white): Signal (S2)	

Product article number of manufacturer	8000-80110-4120300
--	--------------------