



PRE-WIRED CAP FOR EXACT8, 4XM8, 3 POLE

5.0m PUR 4X0.34+2x0,75, UL/CSA

5.0 m

Link to Product

Illustration

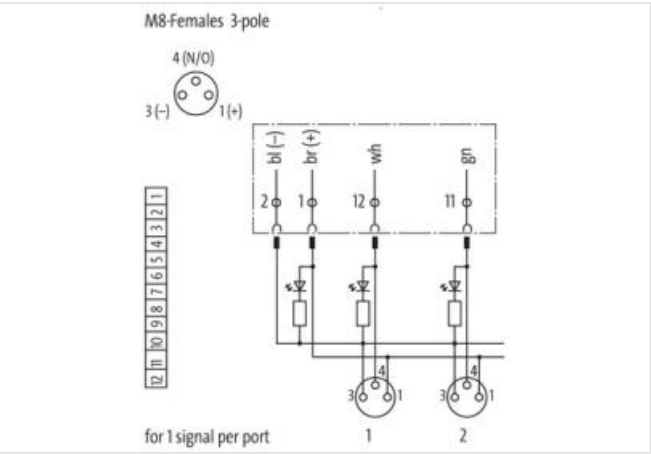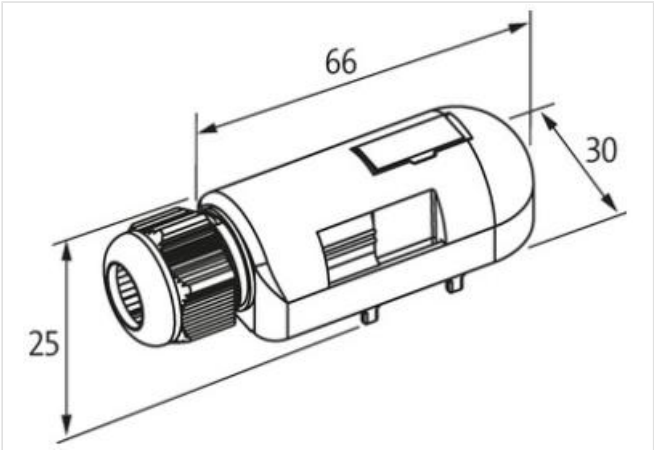

Product may differ from Image

Form	
Form	84049
Technical Data	
Housing	Plastic, flame retardant
Total current	max. 8 A
General data	
Temperature range	-20...+80 °C, depending on cable quality
Cables	
No./diameter of wires	4× 0.34 + 2× 0.75 mm²
Wire isolation	TPE-E
C-track properties	5 Mio.
Outer Ø	7.6 mm ±5%
Cable number	334

Approval (cable)	UL (AWM-Style 20233), CSA
Color (jacket)	gray
Jacket Color	gray
Temperature range (fixed)	-40...+80 °C
Temperature range (mobile)	-5...+60 °C
Bend radius (fixed)	5× outer Ø
Bend radius (moving)	10× outer Ø
Material (jacket)	PUR (UL/CSA)
Product article number of manufacturer	8000-84049-3340500