

PRE-WIRED CAP FOR EXACT8, 4XM8, 3 POLE


3.0m PUR/PVC 4X0.34+2x0,75


PUR/PVC 3.0 m

Link to Product

Illustration



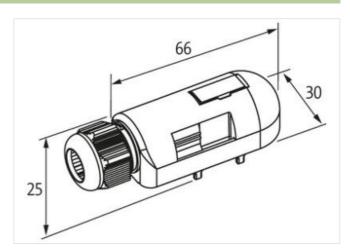



Product may differ from Image

Form	
Form	84049
Technical Data	
Housing	Plastic, flame retardant
Total current	max. 8 A
General data	
Temperature range	-20+80 °C, depending on cable quality
Cables	
No./diameter of wires	$4 \times 0.34 + 2 \times 0.75 \text{ mm}^2$
Wire isolation	PVC (br, bl, ye, wh, gn, gr)
C-track properties	2 Mio.
Outer Ø	6.9 mm ±5%

The information in this brochure has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13



Cable number	337
Color (jacket)	gray
Jacket Color	gray
Temperature range (fixed)	-30+80 °C
Temperature range (mobile)	-5+60 °C
Bend radius (fixed)	5× outer Ø
Bend radius (moving)	10× outer Ø
Material (jacket)	PUR/PVC
Product article number of manufacturer	8000-84049-3370300