




EXACT8, 4XM8, 3 POLE BASIC HOUSING, NPN-LED'S

Without connector cable

4-way, 3-pole  
Inline face or side mounting  
for NPN signals 24 V DC  
Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product

Illustration

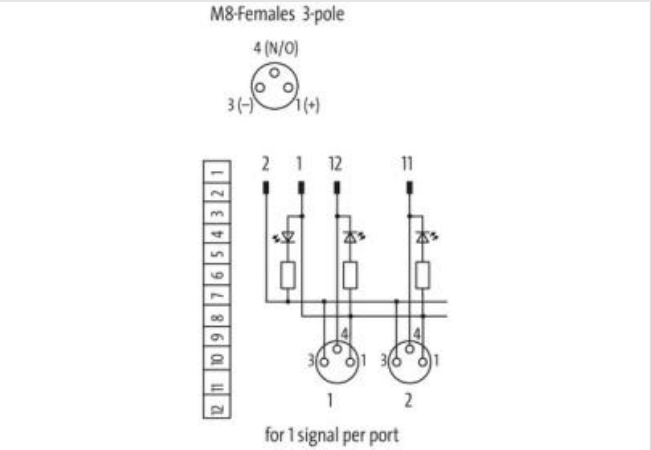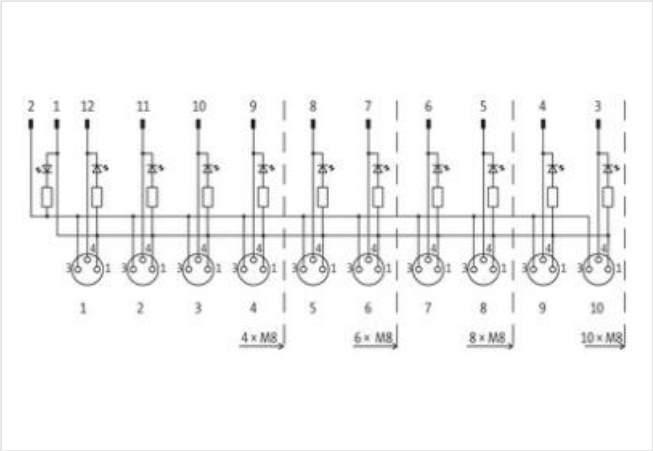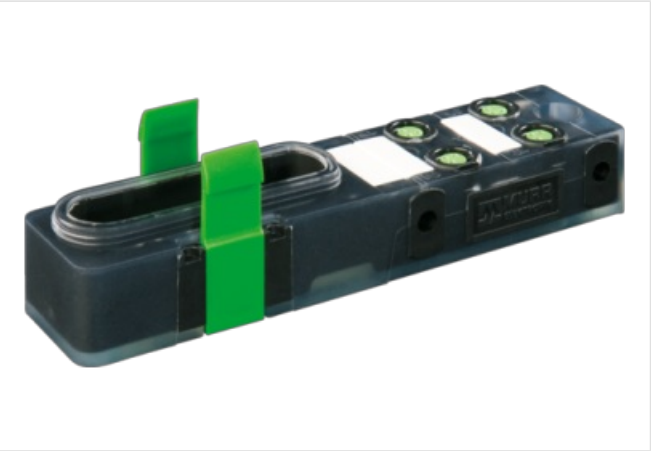

Product may differ from Image



Technical Data	
Operating voltage	24 V DC
Operating current per contact	max. 2 A
Protection	IP65/IP67
Total current	max. 8 A

**General data**

Temperature range -20...+70 °C, depending on cable quality

**Contact Layout**

PIN 1 (+)

PIN 3 (-)

PIN 4 (NO)/(S1)

LED (green): Power / LED (yellow): (S1)

Product article number of manufacturer 8000-84001-0000000