



EXACT8, 4XM8, 3-POL, MOULDED CABLE

5.0m PUR 4X0.34+2x0,75 NPN-LED's


4-way, 3-pole
for NPN signals 24 V DC
Further cable lengths on request.
Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)

Illustration

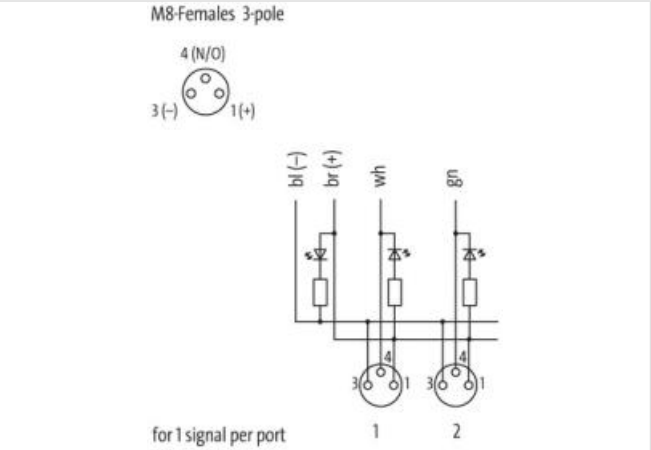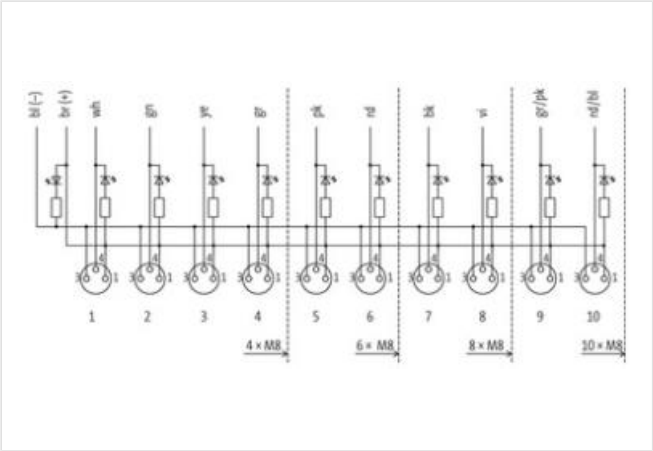

Product may differ from Image

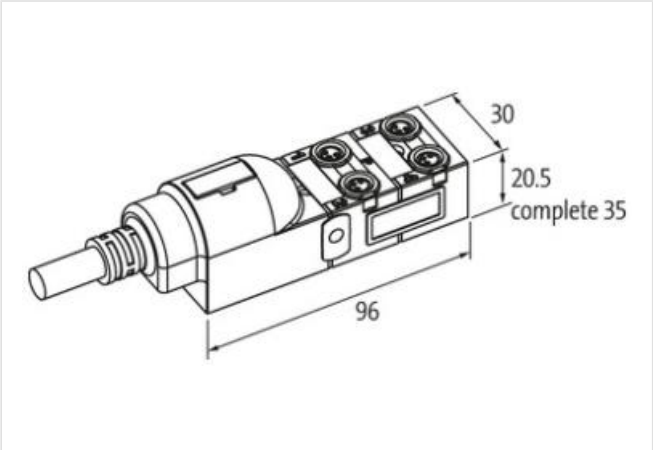

Form	
Form	84011
Technical Data	
Operating voltage	24 V DC
Operating current per contact	max. 2 A

Locking of ports	Screw thread (M8×1 mm)
Protection	IP65/IP67
Housing	Plastic, flame retardant
Signal per port	1 - (31-32)
Total current	max. 8 A

General data

Temperature range	-20...+80 °C, depending on cable quality
-------------------	--

Cables

No./diameter of wires	4× 0.34 + 2× 0.75 mm ²
Wire isolation	TPE-E
C-track properties	5 Mio.
Outer Ø	7.6 mm ±5%
Cable number	334
Approval (cable)	UL (AWM-Style 20233), CSA
Color (jacket)	gray
Jacket Color	gray
Temperature range (fixed)	-40...+80 °C
Temperature range (mobile)	-5...+60 °C
Bend radius (fixed)	5× outer Ø
Bend radius (moving)	10× outer Ø
Material (jacket)	PUR (UL/CSA)

Contact Layout

PIN 1	(+)
PIN 3	(-)
PIN 4	(NO)/(S1)
	LED (green): Power / LED (yellow): (S1)

Product article number of manufacturer	8000-84011-3340500
--	--------------------