

EXACT12, 8XM12, 5-POLE, CAP, PLUG. SPRING TERM.

Self wireable, PNP LED

8-way, 5-pole Form PNP

Spring clamp plug-in terminals


Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.


Link to Product

Illustration







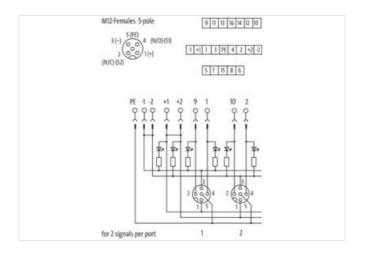

Product may differ from Image



Technical Data	
Operating voltage	24 V DC
Operating current per contact	max. 4 A
Connection	Spring clamp plug-in terminals: max. 1.5 mm² (AWG 16)
Protection	IP65/IP67

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13



Housing	Plastic, flame retardant
Total current	max. 8 A
General data	
Temperature range	-20+70 °C
Contact Layout	
PIN 1	(+)
PIN 2	(NC)/(S2)
PIN 3	(-)
PIN 4	(NO)/(S1)
PIN 5	(Earth)
	LED (green): Power / LED (yellow): (S1) / LED (white): Signal (S2)
Product article number of manufacturer	8000-88540-000000