

EXACT12, 8XM12, 5-POLE, CON. M23 19 POLE

Without con. cable

8-way, 5-pole M23 plug connection 19-pole used with LED for digital PNP-signals 24 V DC


Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.


Link to Product

Illustration







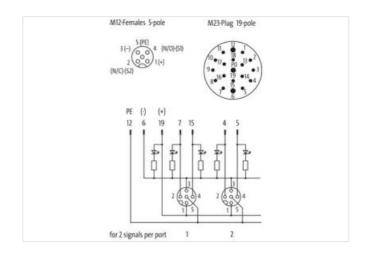

Product may differ from Image



Technical Data	
Operating voltage	24 V DC
Operating current per contact	max. 4 A
Protection	IP65/IP67



Housing	Plastic, flame retardant
Total current	max. 8 A
General data	
Temperature range	-20+80 °C
Contact Layout	
PIN 1	(+)
PIN 2	(NC)/(S2)
PIN 3	(-)
PIN 4	(NO)/(S1)
PIN 5	(Earth)
	LED (green): Power / LED (yellow): (S1) / LED (white): Signal (S2)
Product article number of manufacturer	8000-88520-0000000