

PRE-WIRED CAP FOR EXACT8, 10XM8, 3 POLE


3.0m PUR/PVC 10x0,34+2x0,75


PUR/PVC 3.0 m

Link to Product

Illustration



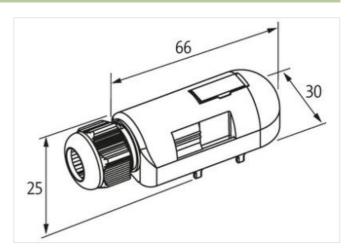



Product may differ from Image

Technical Data	
Housing	Plastic, flame retardant
Total current	max. 8 A
General data	
Temperature range	-20+80 °C, depending on cable quality
Cables	
No./diameter of wires	10× 0.34 + 2× 0.75 mm ²
Wire isolation	PVC (br, bl, wh, gn, pk, ye, bk, gr, rd, vi, grpk, rdbl)
C-track properties	2 Mio.
Outer Ø	8.3 mm ±5%
Cable number	385
Color (jacket)	gray
Jacket Color	gray

The information in this brochure has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13



Temperature range (fixed)	-30+80 °C
Temperature range (mobile)	-5+60 °C
Bend radius (fixed)	5× outer Ø
Bend radius (moving)	10× outer Ø
Material (jacket)	PUR/PVC
Product article number of manufacturer	8000-80049-3850300