

PRE-WIRED CAP FOR EXACT8, 8XM8, 3 POLE


5.0m PUR/PVC 8x0,34+2x0,75


PUR/PVC 5.0 m

Link to Product

Illustration



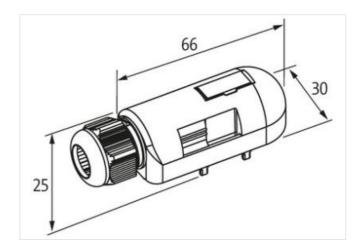



Product may differ from Image

Technical Data	
Housing	Plastic, flame retardant
Total current	max. 8 A
General data	
Temperature range	-20+80 °C, depending on cable quality
Cables	
No./diameter of wires	8× 0.34 + 2× 0.75 mm ²
Wire isolation	PVC (vi, bk, rd, pk, gr, ye, gn, wh+br, bl)
C-track properties	2 Mio.
Outer Ø	8.6 mm ±5%
Cable number	357
Color (jacket)	gray

The information in this brochure has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com



Jacket Color	gray	
Temperature range (fixed)	-30+80 °C	
Temperature range (mobile)	-5+60 °C	
Bend radius (fixed)	5× outer Ø	
Bend radius (moving)	10× outer Ø	
Material (jacket)	PUR/PVC	

8000-88049-3570500

Product article number of manufacturer

The information in this brochure has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com