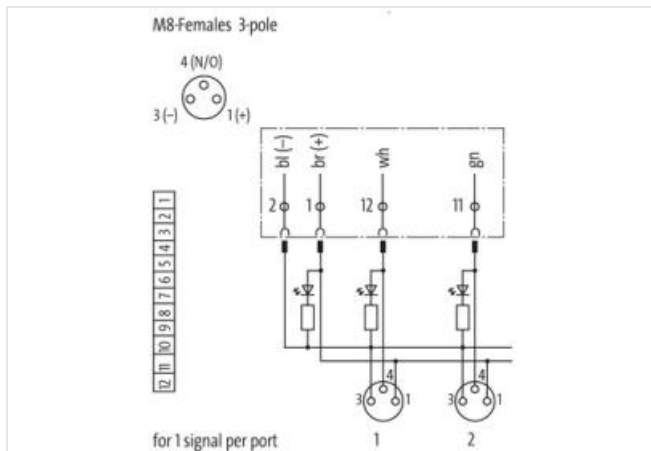
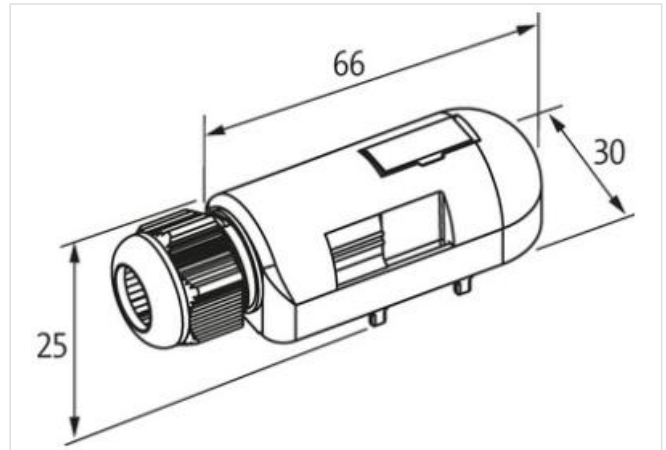


PRE-WIRED CAP FOR EXACT8, 10XM8, 3 POLE

10.0m PUR 10*0,34+2*0,75

10.0 m

[Link to Product](#)**Illustration**

Product may differ from Image

Technical Data

Housing	Plastic, flame retardant
Total current	max. 8 A

General data

Temperature range	-20...+80 °C, depending on cable quality
-------------------	--

Cables

No./diameter of wires	10 × 0.34 + 2 × 0.75 mm ²
C-track properties	5 Mio.
Outer Ø	9.3 mm ±5%
Cable number	384
Approval (cable)	UL (AWM-Style 20233/10042), CSA; CE conform
Color (jacket)	gray
Jacket Color	gray
Temperature range (fixed)	-40...+80 °C

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Temperature range (mobile)	-5...+60 °C
Bend radius (fixed)	5× outer Ø
Bend radius (moving)	10× outer Ø
Material (jacket)	PUR (UL/CSA)
Product article number of manufacturer	8000-80049-3841000