

PRE-WIRED CAP FOR EXACT8, 8XM8, 3 POLE



3.0m PUR/PVC 8x0,34+2x0,75

PUR/PVC

3.0 m

[Link to Product](#)

Illustration

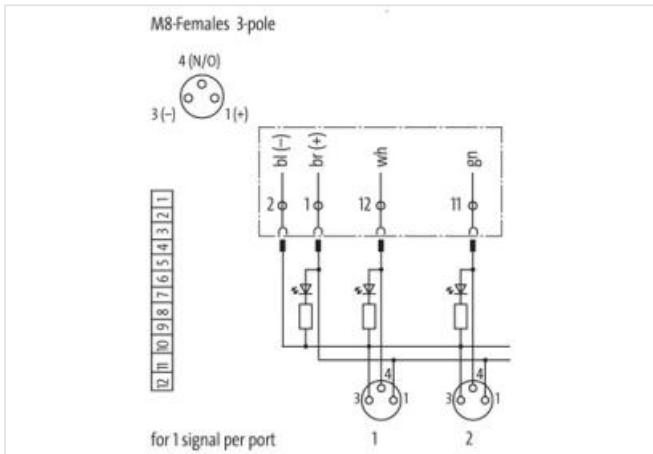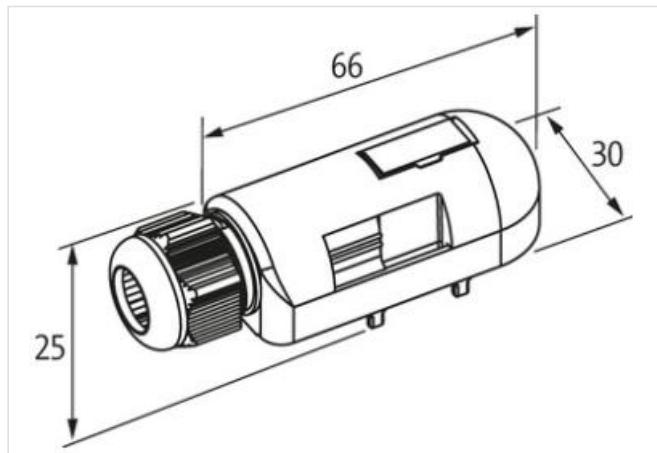

Product may differ from Image

Technical Data

Housing Plastic, flame retardant

Total current max. 8 A

General data

Temperature range -20...+80 °C, depending on cable quality

Cables

No./diameter of wires 8x 0.34 + 2x 0.75 mm²

Wire isolation PVC (vi, bk, rd, pk, gr, ye, gn, wh+br, bl)

C-track properties 2 Mio.

Outer Ø 8.6 mm ±5%

Cable number 357

Color (jacket) gray

Jacket Color	gray
Temperature range (fixed)	-30...+80 °C
Temperature range (mobile)	-5...+60 °C
Bend radius (fixed)	5x outer Ø
Bend radius (moving)	10x outer Ø
Material (jacket)	PUR/PVC
Product article number of manufacturer	8000-88049-3570300