MURR ELEKTRONIK
stay connected


EXACT12, 8XM12, 5-POLE, CAP, PLUG. SCREW-TERM.


8-way, 5-pole
Form PNP
Screw plug-in terminals
Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.


Link to Product

Illustration



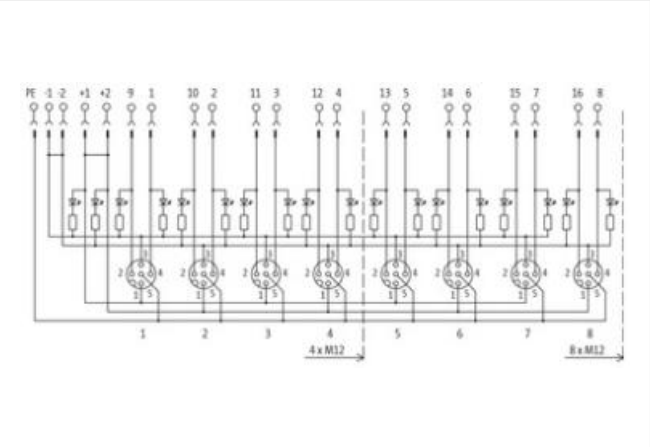

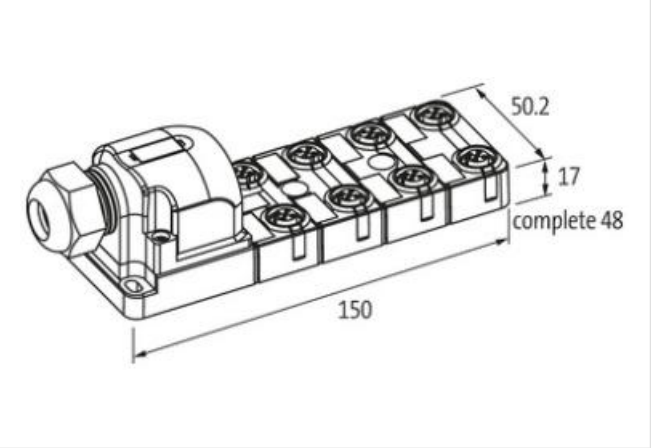

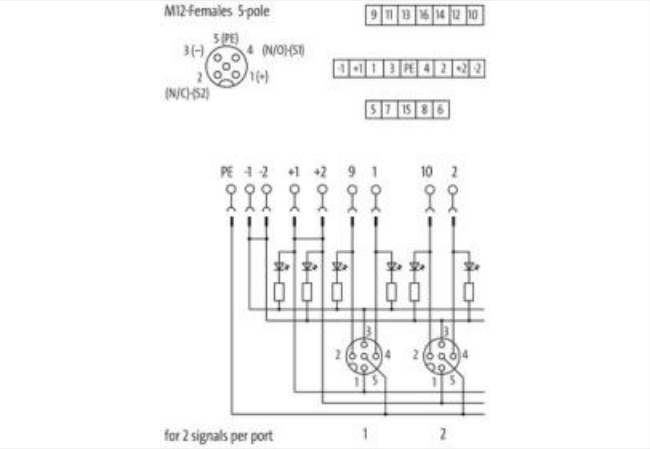

Product may differ from Image

c UL us LISTED

Technical Data

Operating voltage	24 V DC
Operating current per contact	max. 4 A
Connection	Screw plug-in terminals: max. 1.5 mm² (AWG 16)
Protection	IP65/IP67
Housing	Plastic, flame retardant

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Total current	max. 8 A
General data	
Temperature range	-20...+70 °C
Contact Layout	
PIN 1	(+)
PIN 2	(NC)/(S2)
PIN 3	(-)
PIN 4	(NO)/(S1)
PIN 5	(Earth)
	LED (green): Power / LED (yellow): (S1) / LED (white): Signal (S2)
Product article number of manufacturer	8000-88550-0000000

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13