

MVP12, 4XM12, UNIVERSAL, BASIC HOUSING

Pins wired 1:1 to terminal

4-way UNIVERSAL

Basic module

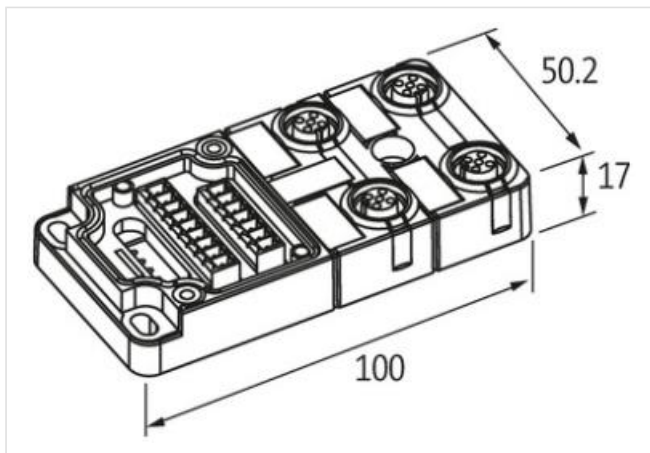
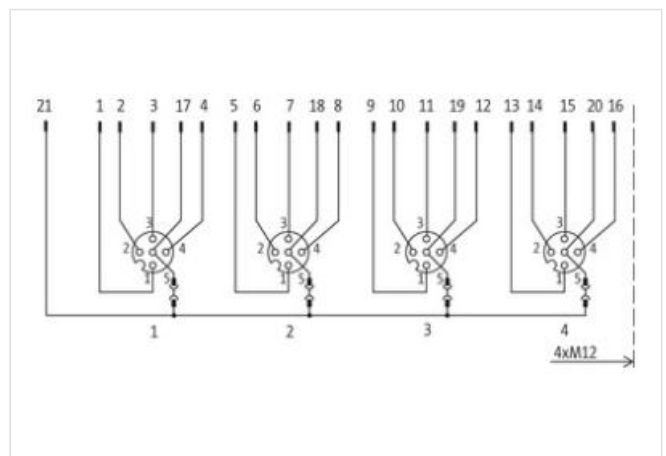
Screw plug-in terminals

Replaces identical product (Art.No. 276624)

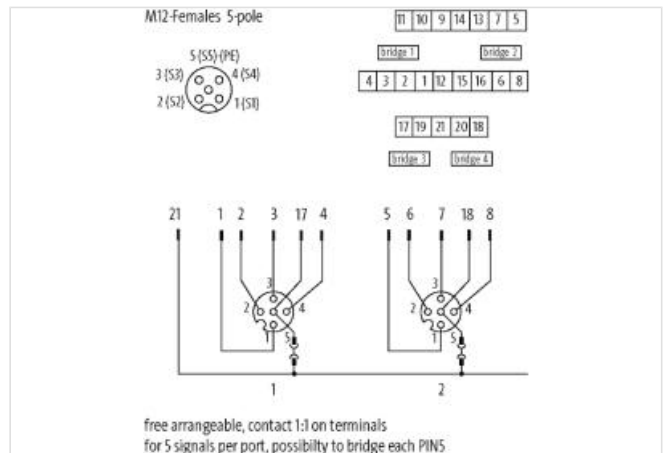
Separation contact 5 possible by removable plug links

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

Product may differ from Image

**Technical Data**

Operating voltage	max. 42 V AC/DC
Operating current per contact	max. 4 A
Protection	IP65/IP67

Housing	Plastic, flame retardant
Total current	max. 8 A

General data

Temperature range	-20...+80 °C
-------------------	--------------

Product article number of manufacturer	8000-44702-0000000
--	--------------------