


MVP12, 8XM12, 5POLE, PLUGGABLE CABLE

10.0m PUR/PVC 16x0,34+5x0,75

8-way, 5-pole
Further cable lengths on request.
PUR/PVC
Plastic housings with good resistance against chemicals and oils.
potentially separated
The resistance to aggressive media should be individually tested for your application. Further details on request.
with LED for digital PNP-signals 24 V DC

Link to Product

Illustration

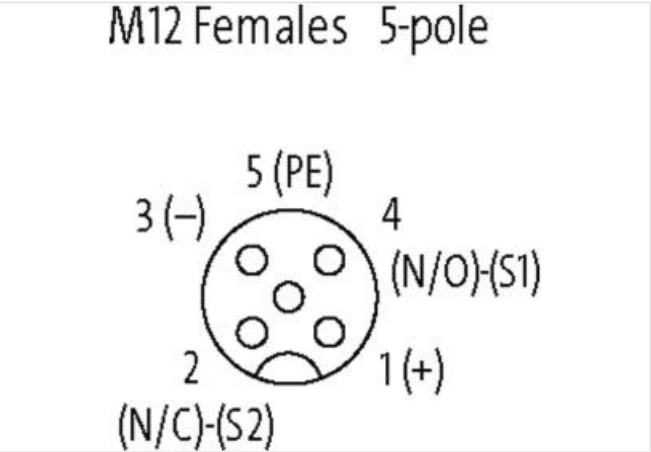

Product may differ from Image



UL
UL

Technical Data	
Operating voltage	24 V DC $\pm$ 25%
Operating current per contact	max. 4 A
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)

Material	PBT
Housing	Plastic, flame retardant
Signal per port	2
Total current	max. 2× 8 A

General data

Temperature range	-20...+80 °C
Dimensions H×W×D	150×50.2×17 mm

Cables

No./diameter of wires	16× 0.34 + 5× 0.75 mm ²
Wire isolation	PVC
C-track properties	1.5 Mio.
Outer Ø	12.5 mm ±5%
Cable number	404
Material (wire)	Cu wire, bare
Resistor (core)	max. 57 Ω/km (0.34 mm ²), max. 26 Ω/km (0.75 mm ²); (20 °C)
Jacket Color	gray
Temperature range (fixed)	-30...+80 °C
Temperature range (mobile)	-30...+80 °C
Bend radius (fixed)	10× outer Ø
Bend radius (moving)	12× outer Ø
Material (jacket)	PUR/PVC

Product article number of manufacturer	27083
--	-------