

## MVP-METALL, 4XM12, 5POLE, M23 19POL. CON.


Connector exit frontside


4-way, 5-pole M23 plug connection, 19-pole with LED for digital PNP-signals 24 V DC Replaces identical product (Art.No. 27530)


## **Link to Product**

## Illustration







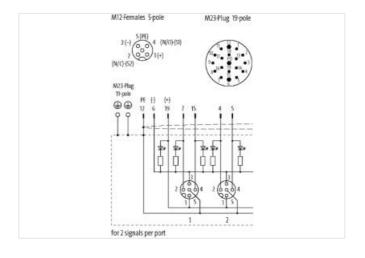

Product may differ from Image



Technical Data	
Operating voltage	24 V DC
Operating current per contact	max. 4 A
Protection	IP65, IP67, IP68
Housing	Zinc die casting, matte nickel plated
Total current	max. 7.5 A

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13



General data	
Temperature range	-25+90 °C
Contact Layout	
PIN 1	(+)
PIN 2	(NC)/(S2)
PIN 3	(-)
PIN 4	(NO)/(S1)
PIN 5	(Earth)
	LED (green): Power / LED (yellow): (S1/S2)
Product article number of manufacturer	8000-54520-0000000