

EXACT8, 4XM8, 4 POLE MOULDED CABLE

10.0m PUR/PVC 8x0,34+2x0,75

PUR/PVC

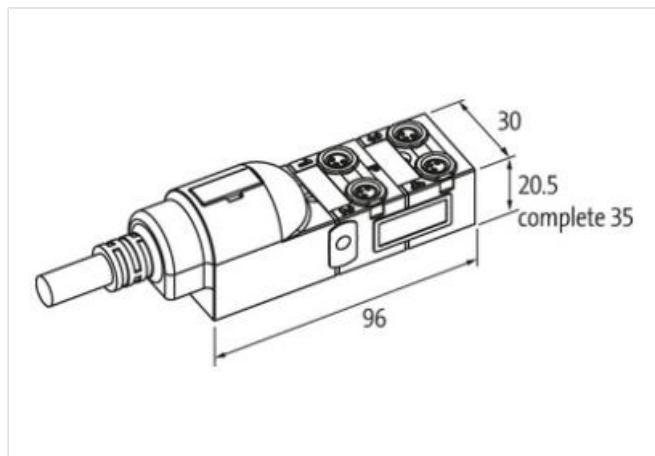
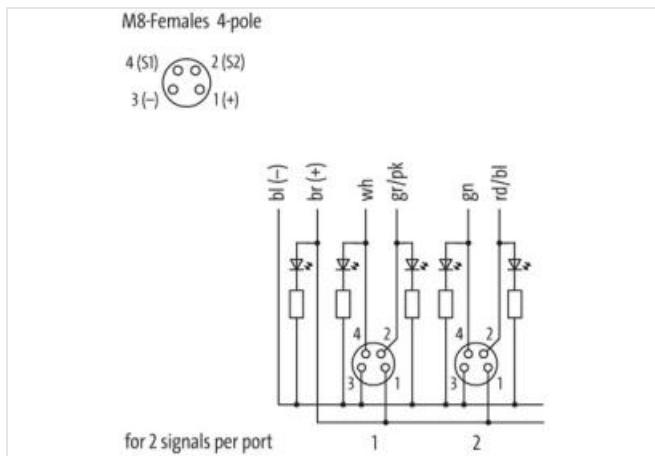
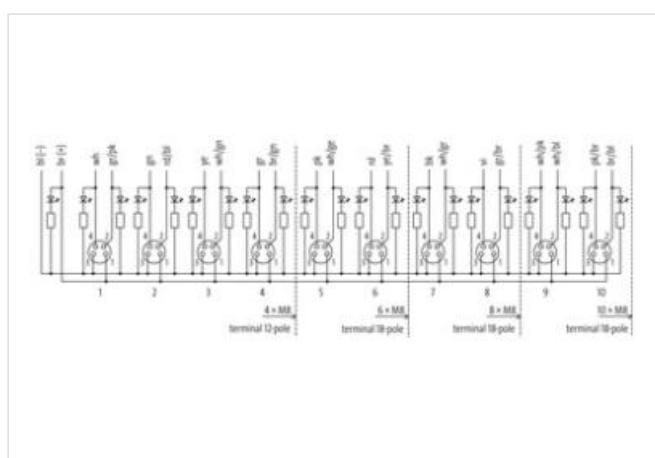
4-way, 4-pole

10.0 m

Further cable lengths on request.

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product**Illustration**

Product may differ from Image

**Form**

Form 84110

Technical Data

Operating voltage 24 V DC

Operating current per contact max. 2 A

Locking of ports	Screw thread (M8x1 mm)
Protection	IP65/IP67
Housing	Plastic, flame retardant
Signal per port	2
Total current	max. 8 A
General data	
Temperature range	-20...+80 °C, depending on cable quality
Cables	
No./diameter of wires	8x 0.34 + 2x 0.75 mm ²
Wire isolation	PVC
C-track properties	1.5 Mio.
Outer Ø	8.6 mm ±5%
Cable number	358
Color (jacket)	gray
Jacket Color	gray
Temperature range (fixed)	-30...+70 °C
Temperature range (mobile)	-5...+60 °C
Bend radius (fixed)	10x outer Ø
Bend radius (moving)	12x outer Ø
Material (jacket)	PUR/PVC
Contact Layout	
PIN 1	(+)
PIN 2	(NC)/(S2)
PIN 3	(-)
PIN 4	(NO)/(S1)
LED (green): Power / LED (yellow): (S1) / LED (white): Signal (S2)	
Product article number of manufacturer	8000-84110-3581000