



EXACT8, 10XM8, 3 POLE PLUG. CAP, SPRING-TERM.

15.0m PUR 10*0,34+2*0,75 exit norm..


15.0 m
10-way, 3-pole
Further cable lengths on request.
Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)

Illustration

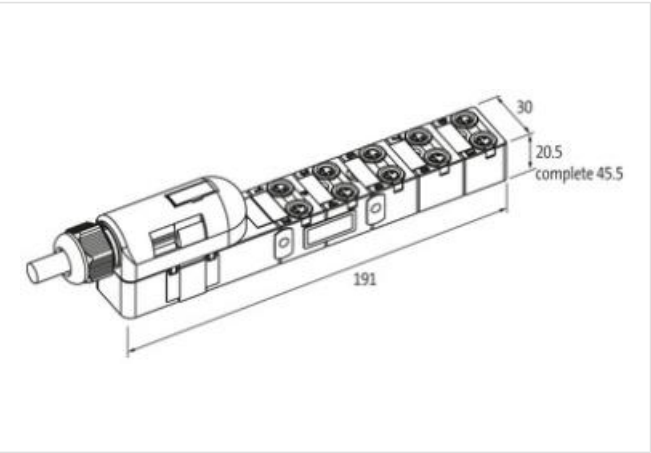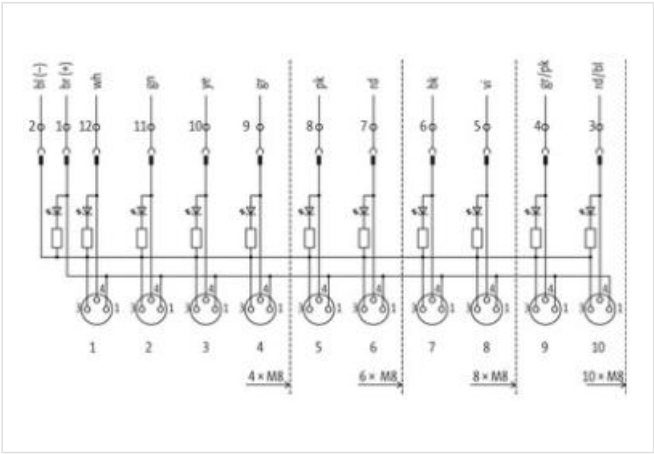

Product may differ from Image

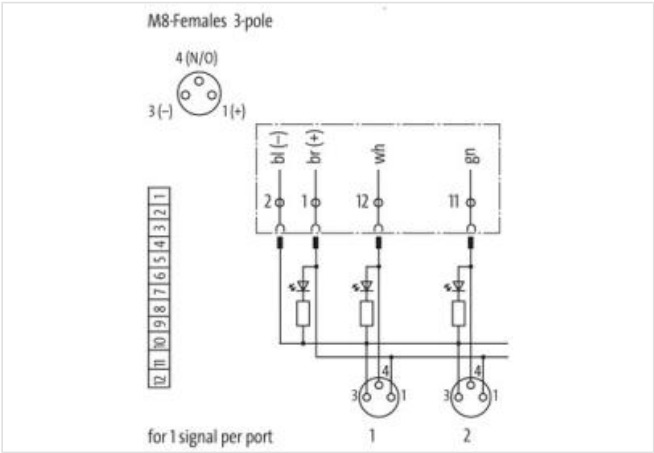

Form	
Form	80040
Technical Data	
Operating voltage	24 V DC
Operating current per contact	max. 2 A
Locking of ports	Screw thread (M8×1 mm)

Connection	Spring clamp plug-in terminals: max. 1.5 mm ² (AWG 16)
Protection	IP67 inserted and tightened (EN 60529)
Housing	Plastic, flame retardant
Signal per port	1 - (31-32)
Total current	max. 8 A

General data

Temperature range	-20...+80 °C, depending on cable quality
-------------------	--

Cables

No./diameter of wires	10× 0.34 + 2× 0.75 mm ²
C-track properties	5 Mio.
Outer Ø	9.3 mm ±5%
Cable number	384
Approval (cable)	UL (AWM-Style 20233/10042), CSA; CE conform
Color (jacket)	gray
Jacket Color	gray
Temperature range (fixed)	-40...+80 °C
Temperature range (mobile)	-5...+60 °C
Bend radius (fixed)	5× outer Ø
Bend radius (moving)	10× outer Ø
Material (jacket)	PUR (UL/CSA)

Contact Layout

PIN 1	(+)
PIN 3	(-)
PIN 4	(NO)/(S1)
	LED (green): Power / LED (yellow): (S1)

Product article number of manufacturer	8000-80040-3841500
--	--------------------