


MVP12, 4XM12, 5POLE, PLUG. TERM.

W/o cap, with pot. separation, w/o LED's

- 4-way, 5-pole
- Basic module without LED
- Potential separation as option
- Plastic housings with good resistance against chemicals and oils.
- The resistance to aggressive media should be individually tested for your application. Further details on request.
- Further cable lengths on request.

Link to Product

Illustration

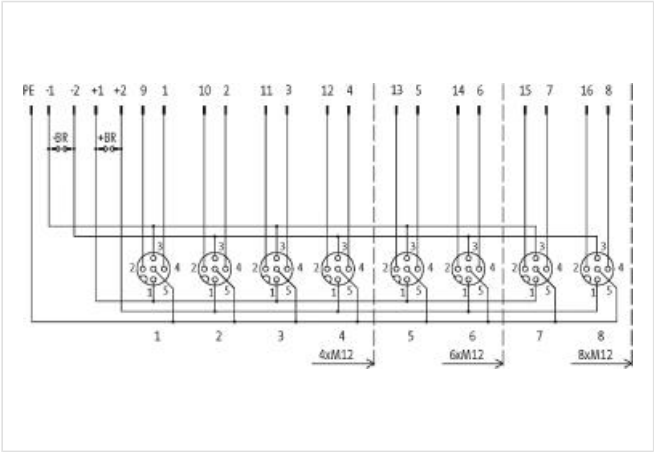

Product may differ from Image



Technical Data	
Operating voltage	24 V DC
Operating current per contact	max. 4 A
Locking of ports	Screw thread (M12×1 mm)

Protection	IP67 inserted and tightened (EN 60529)
Housing	Plastic, flame retardant
Signal per port	2
Total current	max. 2× 8 A

**General data**

Temperature range	-20...+80 °C
Dimensions H×W×D	99.2×50.2×16.5 mm

**Contact Layout**

PIN 1	(+)
PIN 2	(NC)/(S2)
PIN 3	(-)
PIN 4	(NO)/(S1)
PIN 5	(Earth)

Product article number of manufacturer	276576
--	--------