

EXACT8, 8XM8, 3 POLE PLUG. CAP, SPRING-TERM.

15.0m PUR 8x0,34+2x0,75, UL/CSA

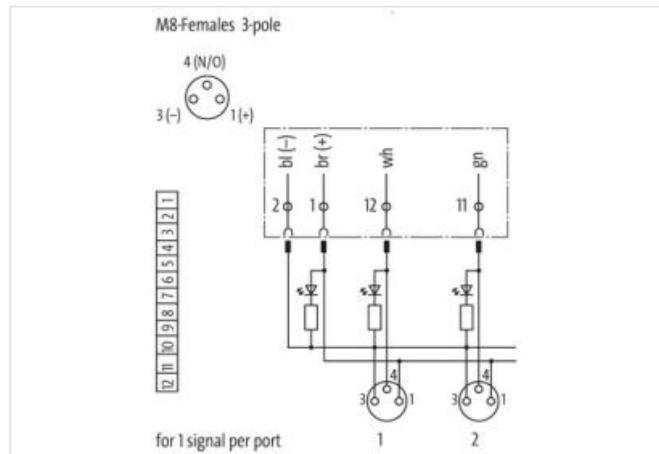
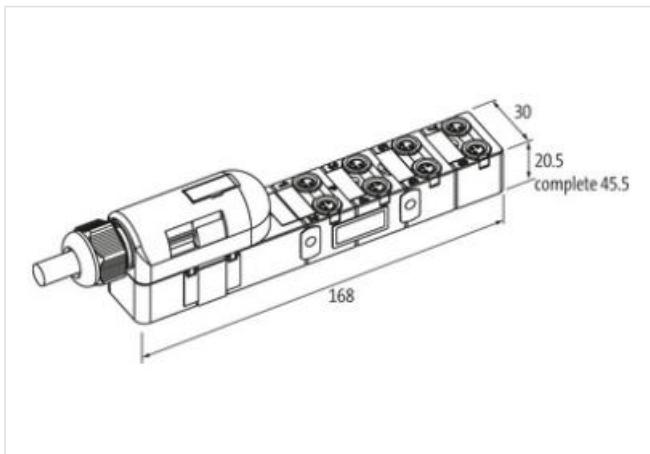
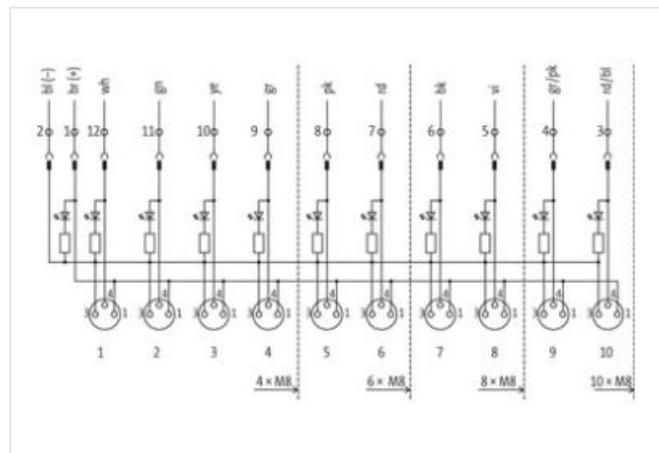
15.0 m

8-way, 3-pole

Further cable lengths on request.

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product**Illustration**

Product may differ from Image

**Form**

Form 88040

Technical Data

Operating voltage 24 V DC

Operating current per contact max. 2 A

Locking of ports Screw thread (M8x1 mm)

Connection	Spring clamp plug-in terminals: max. 1.5 mm ² (AWG 16)
Protection	IP67 inserted and tightened (EN 60529)
Housing	Plastic, flame retardant
Total current	max. 8 A

General data

Temperature range	-20...+80 °C, depending on cable quality
-------------------	--

Cables

No./diameter of wires	8x 0.34 + 2x 0.75 mm ²
Wire isolation	TPE (vi, bk, rd, pk, gr, ye, gn, wh+br, bl)
C-track properties	5 Mio.
Outer Ø	9.2 mm ±5%
Cable number	359
Color (jacket)	gray
Jacket Color	gray
Temperature range (fixed)	-40...+80 °C
Temperature range (mobile)	-5...+60 °C
Bend radius (fixed)	5x outer Ø
Bend radius (moving)	10x outer Ø
Material (jacket)	PUR (UL/CSA)

Contact Layout

PIN 1	(+)
PIN 3	(-)
PIN 4	(NO)/(S1)
LED (green): Power / LED (yellow): (S1)	

Product article number of manufacturer 8000-88040-3591500