



PRE-WIRED CAP FOR EXACT8, 8XM8, 3 POLE

3.0m PUR 8x0,34+2x0,75, UL/CSA

3.0 m

[Link to Product](#)

Illustration

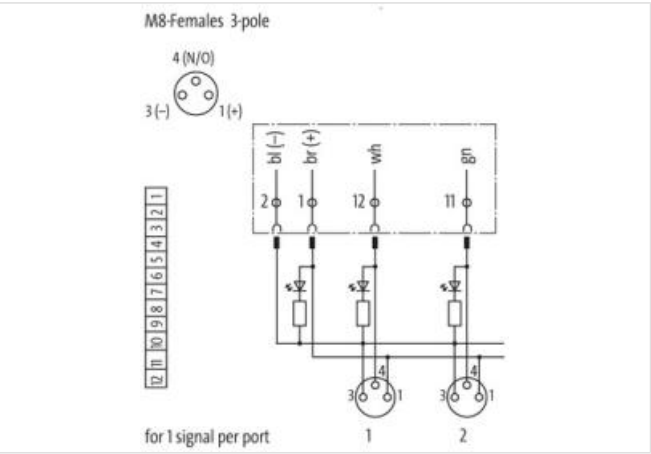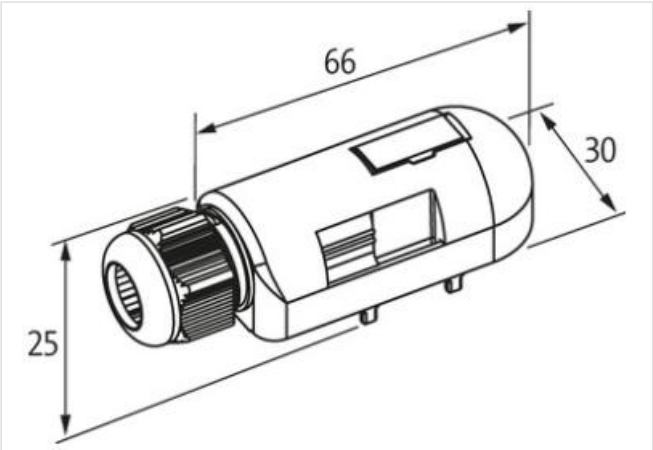

Product may differ from Image

Technical Data	
Housing	Plastic, flame retardant
Total current	max. 8 A
General data	
Temperature range	-20...+80 °C, depending on cable quality
Cables	
No./diameter of wires	8× 0.34 + 2× 0.75 mm²
Wire isolation	TPE (vi, bk, rd, pk, gr, ye, gn, wh+br, bl)
C-track properties	5 Mio.
Outer Ø	9.2 mm ±5%
Cable number	359
Color (jacket)	gray
Jacket Color	gray
Temperature range (fixed)	-40...+80 °C

Temperature range (mobile)	-5...+60 °C
Bend radius (fixed)	5× outer Ø
Bend radius (moving)	10× outer Ø
Material (jacket)	PUR (UL/CSA)
Product article number of manufacturer	8000-88049-3590300