



MVP12, 8XM12, 5POLE, M23 19POL. CON.

Connector exit 90°


8-way, 5-pole
M23 plug connection, 90°
19-pole used
with LED for digital PNP-signals 24 V DC
Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.
Further cable lengths on request.

Link to Product

Illustration

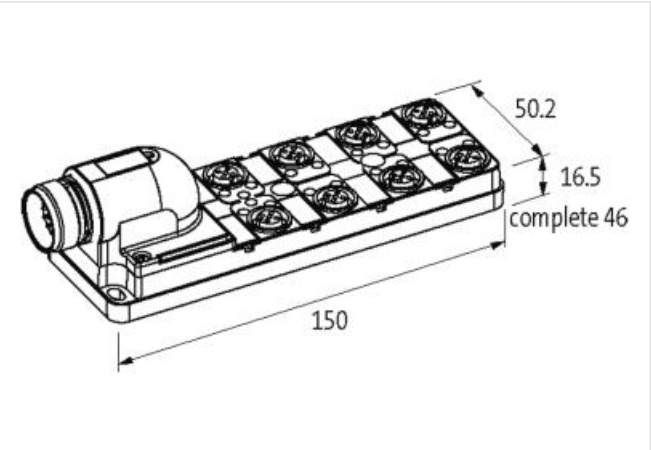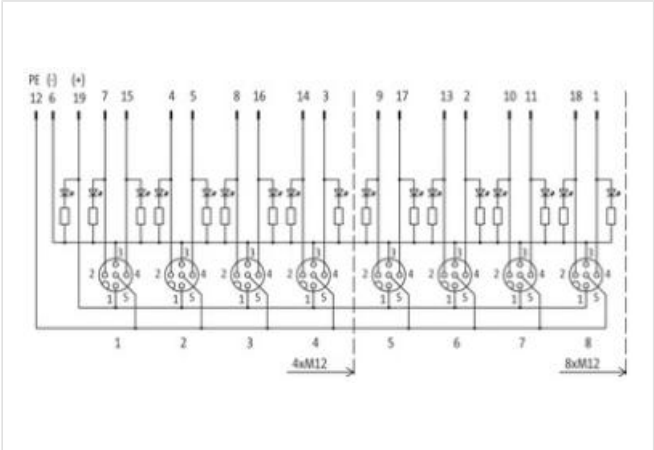

Product may differ from Image

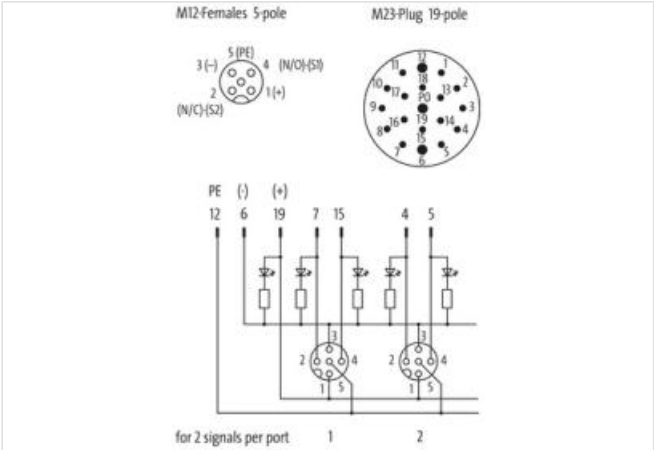

| Technical Data | |
|-------------------------------|----------|
| Operating voltage | 24 V DC |
| Operating current per contact | max. 4 A |

| | |
|------------------|--|
| Locking of ports | Screw thread (M12×1 mm) |
| Protection | IP67 inserted and tightened (EN 60529) |
| Housing | Plastic, flame retardant |
| Signal per port | 2 |
| Total current | max. 7.5 A |

General data

| | |
|-------------------|----------------|
| Temperature range | -20...+80 °C |
| Dimensions H×W×D | 150×50.2×17 mm |

Contact Layout

| | |
|--|-----------|
| PIN 1 | (+) |
| PIN 2 | (NC)/(S2) |
| PIN 3 | (-) |
| PIN 4 | (NO)/(S1) |
| PIN 5 | (Earth) |
| LED (green): Power / LED (yellow): (S1/S2) | |

| | |
|--|-------|
| Product article number of manufacturer | 27785 |
|--|-------|